

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal


Solar Panel Guide Specification Data Sheet

Shenzhen Shine Solar Co., Ltd.

SN-P070

SN-P070

Also available on the web at
EnergyPal.com/shenzhen-shine-solar-co-ltd-solar-panels/sn-p070

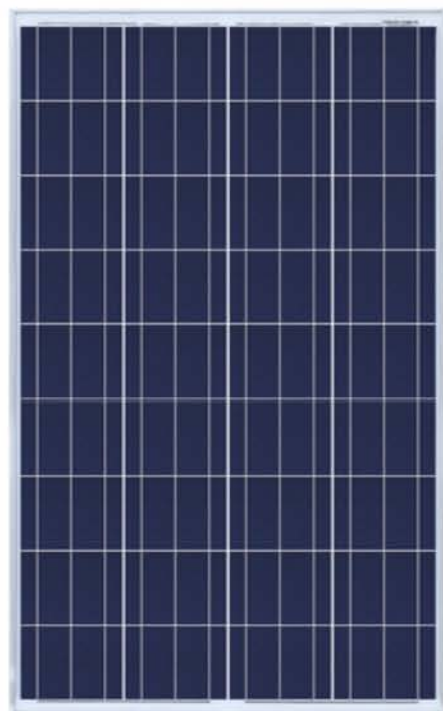

Datasheet

70Wp

Polycrystalline solar PV module

Model Number	SN-P070
Maximum Power (pmax)	70Wp
Optimum Operating Voltage/Vmp	18.0V
Optimum Operating Current/Imp	3.89A
Open Circuit Voltage /Voc	21.6V
Short Circuit Current /Isc	4.09A
Module Efficiency	13.7%
Power Tolerance (%)	±3
Maximum Series Fuse Rating	15A
Maximum system voltage	1000 V DC


Maximum Data

Operating Temperature	-40°C~+80°C	°C
Storage temperature	from -40°C ~+80°C	°C
Instulation cut voltage	1000	DC
Maximum wind resistance	60m/s	N/m ² or max Km/h
Surface maximum load capacity	200	Kg/m ²
Maximum hail load capacity	25mm	80km/h


EFFICIENCY

- Low voltage-temperature coefficient allows higher power output at high-temperature condition
- High efficient, high reliable solar cells ensure our product output stability

Physical Characteristics

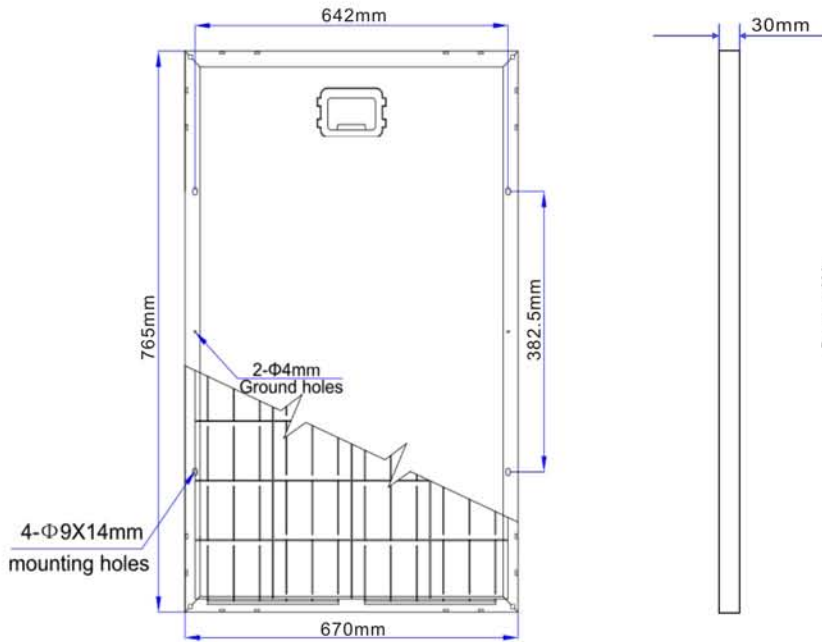

I-V Curve

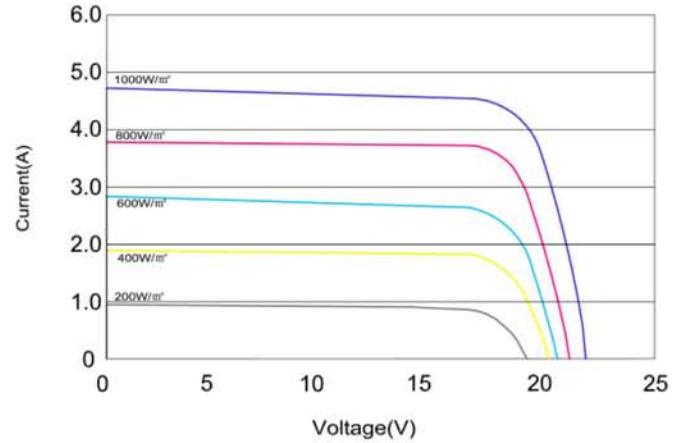

Laminating Data

Cell dimension (mm)	156 x 78
Dimensions (mm)	765x670x30
Number of cells	36(4*9)
Weight	7.3Kg
Frame Material	Clear anodized aluminium frame
Thickness of glass	3.2 mm tempered glass
Frame	Anodized aluminum alloy
Laminating material	EVA
Backsheet material	TPT
Junction Box	Ip65


STC

AM condition	AM1.5
Intensity of illumination	1000W/m ²
temperature	25°C

Temperature Characteristics

Nominal Operating Cell Temperature (NOCT)	45±2°C
Temperature Coefficient of Pmax	-0.45%/°C
Temperature Coefficient of Voc	-0.34%/°C
Temperature Coefficient of Isc	0.050%/°C

Superior Warranty

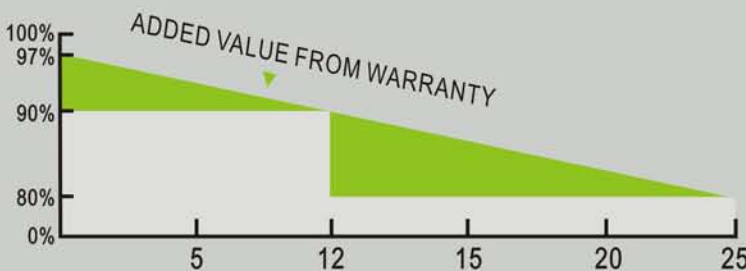

- 10** 10-years Manufacturing warranty.
- 12** 12-years warranty 90% power output.
- 25** 25-years warranty 80% power output.