

**For a Free Quote:**

**Web: [EnergyPal.com/solar](http://EnergyPal.com/solar)**

**Call: 1-800-990-3725**

**Email: [contact@energypal.com](mailto:contact@energypal.com)**

# **EnergyPal**

## **Solar Panel Guide Specification Data Sheet**

**SpolarPV Technology Co., Ltd.**

**SPHM6-60L 325-340W**

**SP335HM6-120L**

Also available on the web at  
[EnergyPal.com/spolarpv-technology-co-ltd-solar-panels/sp335hm6-120l](http://EnergyPal.com/spolarpv-technology-co-ltd-solar-panels/sp335hm6-120l)


# SPHM6-120L 325-340 Watt

## MONO CRYSTALLINE MODULE

- SP325HM6-120L
- SP330HM6-120L
- SP335HM6-120L
- SP340HM6-120L



**SpolarPV**  
Superior, Premium

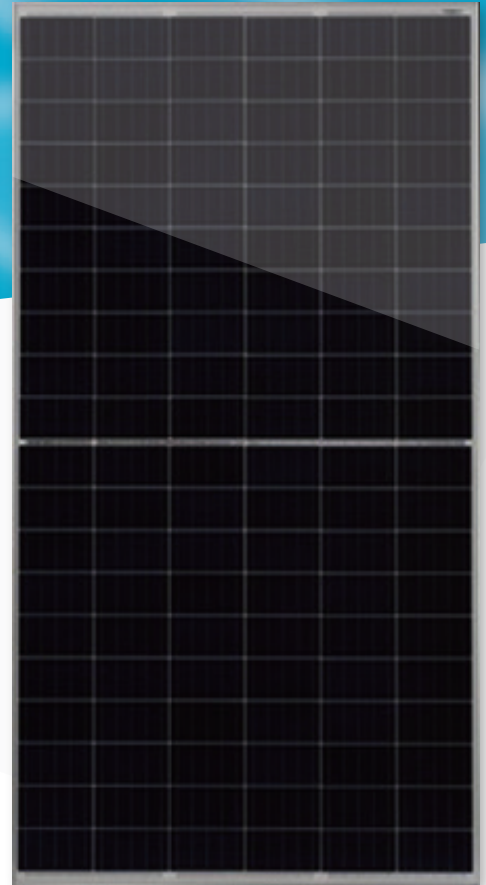

### 22.2%

Module efficiency



Product warranty

### 340 W

Highest power output




Linear power warranty

### 0 ~ +5W

Positive power tolerance

### Key Features

#### Linear Performance Warranty

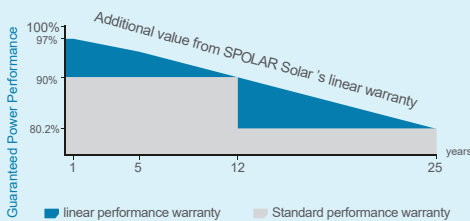

#### High Efficiency

Higher module conversion efficiency benefit from Passivated Emitter Rear Contact (PERC) technology.



#### PID Resistant

Excellent Anti-PID performance guarantee limited power degradation for mass production.



#### Low-light Performance

Advanced glass and cell surface texture design ensure excellent performance in low light environment.



#### Severe Weather Resilience

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).



#### Durability against extreme environmental conditions

High salt mist and ammonia resistance.



ISO9001:2016 ISO14001:2016  
OHSAS18001:2011 certified factory.  
IEC61215 IEC61730 certified products.

[www.spolarpv.com](http://www.spolarpv.com)

## Electrical Characteristics at Standard Test Conditions (STC)

Module Type	SP325HM6-120L	SP330HM6-120L	SP335HM6-120L	SP340HM6-120L
Maximum Power -Pmax (W)	325	330	335	340
Maximum Power Voltage - Vmp (V)	34.36	34.63	34.9	35.1
Maximum Power Current - Imp (A)	9.46	9.53	9.60	9.82
Open-circuit Voltage - Voc (V)	41.26	41.53	41.78	41.98
Short-circuit Current - Isc (A)	9.99	10.08	10.16	10.46
Module Efficiency STC (%)	19.28%	19.57%	19.87%	22.2%


## Electrical Characteristics at Normal Operating Cell Temperature (NOCT)

Module Type	SP325HM6-120L	SP330HM6-120L	SP335HM6-120L	SP340HM6-120L
Maximum Power -Pmax (W)	242	246	250	252
Maximum Power Voltage - Vmp (V)	31.99	32.24	32.49	34.38
Maximum Power Current - Imp (A)	7.58	7.58	7.69	7.82
Open-circuit Voltage - Voc (V)	39.09	39.34	39.58	39.68
Short-circuit Current - Isc (A)	8.06	8.13	8.20	8.36
Power tolerance	0~+5W	Operating Temperature(°C)		-40 C ~+85 C
Temperature coefficients of Pmax	-0.40%/C	Maximum system voltage		1000/1500VDC
Temperature coefficients of Voc	-0.31%/C	Maximum series fuse rating		15A
Temperature coefficients of Isc	0.05%/C	Nominal operating cell temperature		45±2C

## Mechanical Characteristics


Cell Type	Mono-crystalline PERC 158.75×79.38mm
No.of cells	120 (6×20)
Dimensions	1686×1002×35mm
Weight	18.5 kg
Front Glass	3.2mm, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP67 Rated
Output Cables	1×4.0mm <sup>2</sup> , Length:900mm or Customized Length
Packaging Configuration	30pcs/pallet , 60-64pcs/stack, 780-832pcs/40'HQContainer ( Two pallets=One stack )

## Dimensions

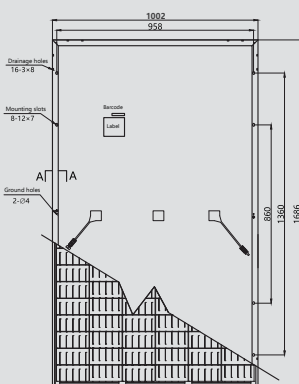

## IV-Curvas

Current-Voltage Curve under different irradiance



Current-Voltage Curve under different working temperatures

