

**For a Free Quote:**

**Web: [EnergyPal.com/solar](http://EnergyPal.com/solar)**

**Call: 1-800-990-3725**

**Email: [contact@energypal.com](mailto:contact@energypal.com)**

# **EnergyPal**

## **Solar Panel Guide Specification Data Sheet**

**Simax (Suzhou) Green New Energy Co., Ltd.**

**SP672 280-320**

**SP672-295**

Also available on the web at

[EnergyPal.com/simax-suzhou-green-new-energy-co-ltd-solar-panels/sp672-295](http://EnergyPal.com/simax-suzhou-green-new-energy-co-ltd-solar-panels/sp672-295)

## Product Features



### Positive tolerance

Guaranteed tolerance +3%  
Reliable power output



### High module efficiency

Module efficiency up to 16.5%  
Cells efficiency up to 18.5%



### Strong compressive strength

Certified to withstand high wind of 2400Pa  
and snow loads of 5400Pa



### High manufacture standards

certified to high standards by the  
most reputable labs According to  
IEC:61215: IEC:61730-1/2



### International Management System

Manufactured and certified according  
to ISO9001, Quality management system



### Fire test approved

Application class A, Safety Class II, Fire Rating C



### Excellent performance under extreme condition

High salt mist and ammonia resistance




### Reliable quality forever

Without potential induced  
degradation (PID-free)

## Leading Warranty in PV Industry

- 25 year transferrable power output warranty: 10 years / 90%, 25 years / 80%
- Linear performance warranty from SIMAX Power
- 12 year material and workmanship warranty

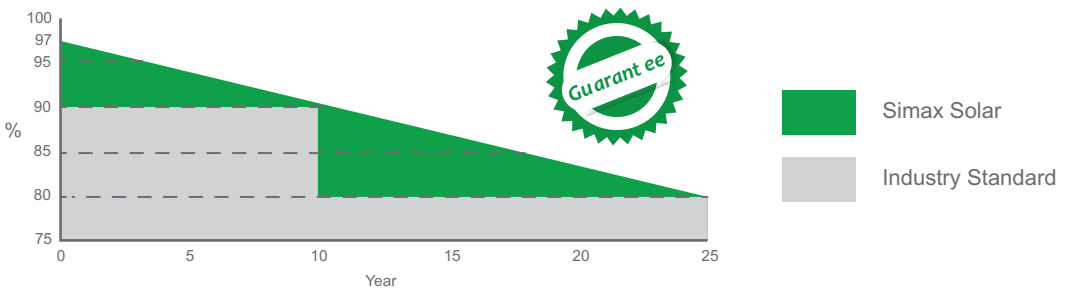

\* Please refer to Simax Solar Product Warranty for details.




### Electrical Characteristics

Parameters	SP672-280		SP672-285		SP672-290		SP672-295		SP672-300		SP672-305		SP672-310		SP672-315		SP672-320	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Peak power [Wp] P <sub>mpp</sub>	280W	208W	285W	212W	290W	215W	295W	219W	300W	223W	305W	226W	310W	228W	315W	230W	320W	232W
Open circuit voltage [V] V <sub>oc</sub>	44.4	44.7	44.6	45.0	44.6	45.3	44.8	45.5	45.0	45.8	45.2	45.8	45.4	45.6	45.8	46.0	46.0	46.2
Maximum Power Voltage [V] (V <sub>mpp</sub> )	35.8	37.2	36.0	37.4	36.0	37.4	36.2	37.8	36.3	38.0	36.5	38.0	36.7	38.0	36.8	38.1	37.0	38.1
Maximum Power Current [A] (I <sub>mpp</sub> )	7.82	5.59	7.92	5.65	8.06	5.76	8.15	5.79	8.26	5.87	8.36	5.95	8.44	6.00	8.56	6.04	8.65	6.09
Short circuit Current [A] (I <sub>sc</sub> )	8.70	5.94	8.78	5.99	8.82	6.06	8.86	6.12	8.93	6.25	8.99	6.89	9.10	7.21	9.17	7.36	9.27	7.50
Power Tolerance	0~+3%		0~+3%		0~+3%		0~+3%		0~+3%		0~+3%		0~+3%		0~+3%		0~+3%	
Module Efficiency (%)	14.5%		14.7%		14.9%		15.2%		15.5%		15.7%		16.0%		16.3%		16.5%	

STC: Irradiance : 1000 W/m<sup>2</sup> ; Spectrum AM 1.5; Cell temperature: 25°C; Wind 0 m/s  
 NOCT: Irradiance: 800W/m<sup>2</sup> ; Spectrum AM 1.5; ambient temperature 20°C, wind speed 1 m/s

### Mechanical Characteristics

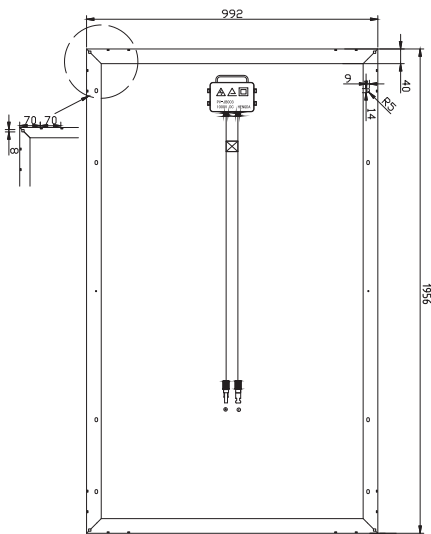

Solar Cell	Polycrystalline silicon 156 x 156 (mm)
No. of Cells	72 ( 6 x 12 )
Dimensions	1956 x 992 x 40 mm
Weight	22.5kg
Front Glass	3.2mm (0.13 inches) tempered glass
Frame	Anodized aluminum alloy



### Output

Cable Type	Ø = 4 mm <sup>2</sup>
Lengths	L = 900 mm
Junction Box	PV - JB003 MC4


### Temperature Coefficients

Nominal Operating Cell Temperature (NOCT)	45 ± 2°C
Temperature Coefficient of (P <sub>max</sub> )	-0.39% / °C
Temperature Coefficient of (V <sub>oc</sub> )	-0.34% / °C
Temperature Coefficient of (I <sub>sc</sub> )	0.035% / °C

- Provide the best solutions for photovoltaic power generation and technical support
- Provide Cost-effective products
- Provide 12 Years Quality Warranty
- Power out ≥ 90% in 10 years
- Power out ≥80% in 25 years



Global standby to ensure response within 24 hours  
 Australia and Europe office were established to give better services to customers

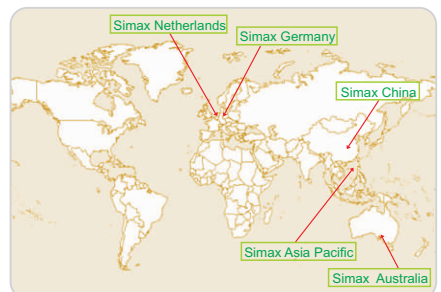

**Simax Green New Energy (Europe) GmbH**  
 Mergenthaler Allee 23 / 25  
 65760 Eschborn / Germany  
 Tel.: +49 6196 9739 525  
 Fax: +49 6196 5929 684  
 info@simaxsolar.de  
 www.simaxsolar.de



**Simax (Australia) Green New Energy Pty Ltd**  
 5 / 78 Frankston Gardens Drive,  
 Carrum Downs, VIC 3210  
 Tel: +61 3 9708 2400  
 Fax: +61 3 9708 2482  
 info@simaxsolar.com.au  
 www.simaxsolar.com.au

