

For a Free Quote:

Web: **EnergyPal.com/solar**

Call: **1-800-990-3725**

Email: **contact@energypal.com**

EnergyPal


Solar Panel Guide Specification Data Sheet

**Seraphim Solar System Co., Ltd.
Eclipse SRP-E11B
SRP-305-E11B**

Also available on the web at
EnergyPal.com/seraphim-solar-system-co-ltd-solar-panels/srp-305-e11b



SHIFTING THE FUTURE

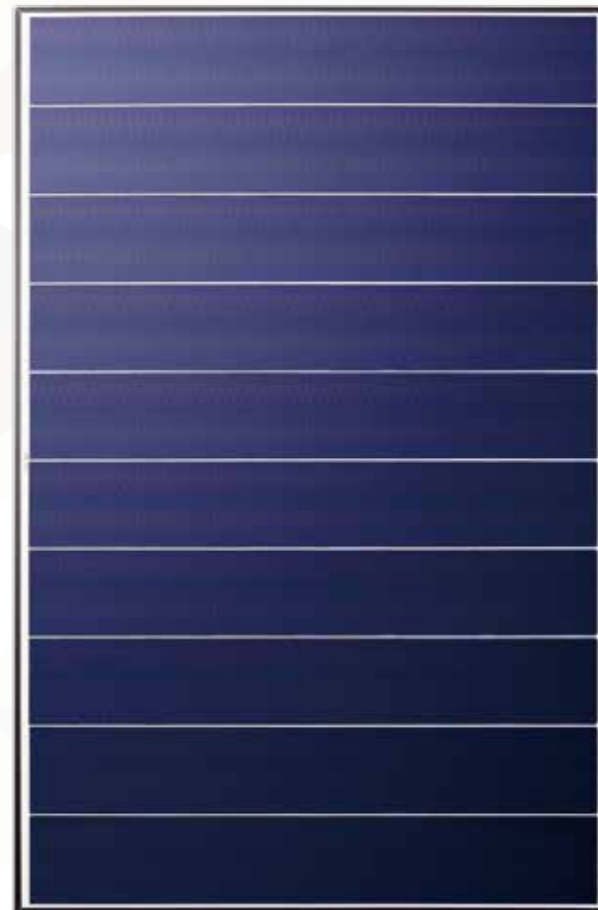

Eclipse Module
295W-310W

BEHIND THE ECLIPSE


We challenged ourselves to push the boundaries of PV technology and pioneer new innovations in solar module design. The design of the Eclipse module takes into consideration every element that defines a perfect solar module. The culmination of our efforts is a module that is superior in performance, reliability, safety, and value.



The Eclipse module takes advantage of Seraphim's innovative module technology, using traditional solar cells to increase efficiency and reliability while reducing BOS cost. The Eclipse module bridges the gap between functionality and design, providing an elegant solution to all your solar energy needs.




15% Greater Return on Projects

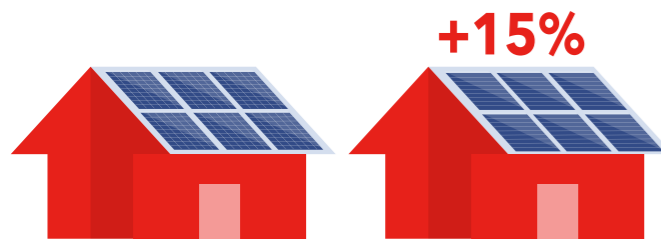

10% Reduction in BOS and Installation Cost




Improved Reliability and Durability

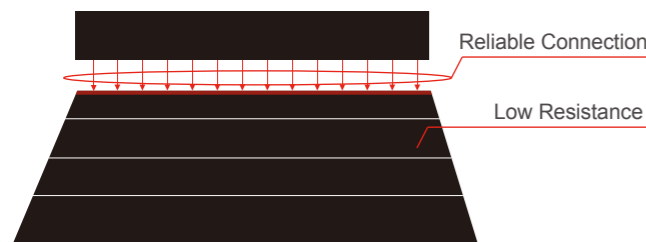

Significantly Reduced Hot-Spot Effect

Temperature after shading test (at 5hrs, in °C)

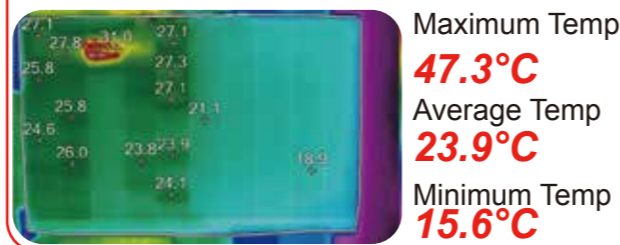

More Benefits

- Better performance under shade
- Beautifully designed
- 5400Pa Mechanical Load


Certifications



Insurances



Warranty

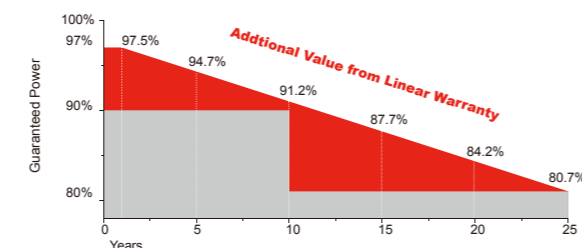

10 YEARS Guarantee on product material and workmanship
25 YEARS linear power output warranty

Electrical Characteristics

	SRP-295-E11B		SRP-300-E11B		SRP-305-E11B		SRP-310-E11B	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmp)	295	219	300	222	305	226	310	230
Open Circuit Voltage (Voc)	43.7	40.25	43.95	40.48	44.2	40.7	44.45	40.93
Short Circuit Current (Isc)	8.57	6.96	8.67	7.02	8.76	7.08	8.86	7.16
Maximum Power Voltage (Vmp)	35.55	33.35	35.75	33.51	35.95	33.76	36.15	33.93
Maximum Power Current (Imp)	8.30	6.57	8.40	6.63	8.49	6.70	8.58	6.78
Module Efficiency at STC(ηm)	17.34		17.64		17.93		18.23	
Power Tolerance	(0,+4.99)							
Maximum System Voltage	1000 (TÜV), 1000 (UL)							
Maximum Series Fuse Rating	20A							

STC: Irradiance 1000 W/m² module temperature 25°C AM=1.5;
 NOCT: Irradiance 800 W/m² ambient temperature 20°C wind speed :1m/s
 Power measurement tolerance: +/-3%

Temperature Characteristics




Pmax Temperature Coefficient	-0.41 %/°C
Voc Temperature Coefficient	-0.32 %/°C
Isc Temperature Coefficient	+0.05 %/°C
Operating Temperature	-40 ~ +85 °C
Nominal Operating Cell Temperature (NOCT)	45±2 °C

Mechanical Specifications

External Dimensions	1623x 1048x 35 mm
Weight	18.5 kg
Solar Cells	Poly crystalline
Front Glass	3.2 mm tempered glass, low iron
Frame	Anodized aluminium alloy
Junction Box	IP67
Output Cables	4.0 mm ² , cable length: 1000 mm
Connector	MC4 Compatible
Mechanical Load	5400 Pa

Packing Configuration

	1623x 1048x 35 mm
Container	40' HQ
Pieces per Pallet	30
Pallets per Container	28
Pieces per Container	840

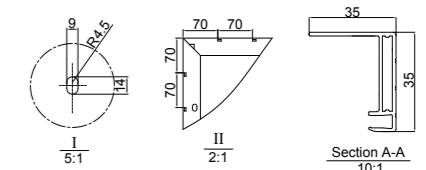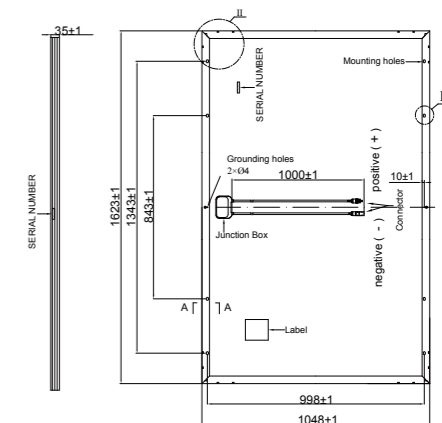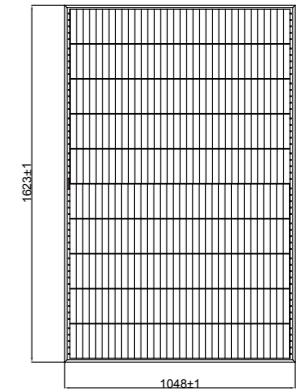

I-V Curve (SRP-295-E11B)

