

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet

**DONGGUAN SUNWORTH NEW ENERGY TECH
CO.,LTD
SW200-210P
SW210P**

Also available on the web at
EnergyPal.com/dongguan-sunworth-new-energy-tech-co-ltd-solar-panels/sw210p



Company

Sunworth solar, we commit ourselves to R&D, manufacture and technical innovation on PV modules and solar power system. To provide high quality products with various specifications for customers is always our pursuit.

Characteristics

- Use high quality solar cells to advanced encapsulation
- Adopt high transparent low-iron tempered glass, high quality anti-UV EVA and back sheet.
- With multi-ply performance testing for each module, to ensure the product quality and output performance.
- Using anodization aluminum frame with anticorrosion, to ensure solar module working under extremely and badly outdoors environment

Warranty

- 20 years power output warranty, 90% power output for 5years, and 80% power output for 20years.
- 3 years workmanship warranty.

Quality and safety

- ISO9001:2008 certified supplier, we provide world first class solar products for clients.
- IEC 61215, IEC 61730, IEC, CQC, CGC, CE, approved.



Electrical Characteristics

Model No.	SW200P	SW205P	SW210P
Maximum Power (Pmax)	200W	205W	210W
Max-power Voltage (Vmp)	36.3V	36.3V	36.4V
Max-power Current (Imp)	5.51A	5.65A	5.77A
Open-circuit Voltage (Voc)	42.8V	42.8V	42.9V
Short-circuit Current (Isc)	6.02A	6.17A	6.30A
Module Efficiency	15.2%	14.9%	14.9%
Operating Temperature	-40°C~+85°C		
Maximum System Voltage	1000Vdc		
Maximum Series Fuse Rating	15A		
Power tolerance	+3%		

*STC condition: 1000 W/m²,1.5AM and 25°C cell temperature.

Temperature characteristics

NOCT	46°C±2°C
Temperature Co-efficient of Pmax	-0.398%/°C
Temperature Co-efficient of Voc	-0.34%/°C
Temperature Co-efficient of Isc	0.0576%/°C


Mechanical characteristics

Model No.	SW200P	SW205P	SW210P
Cell Type	Polycrystalline silicon 156mm cutting		
Cell Arrangement	72(6*12)	72(6*12)	72(6*12)
Dimensions	1330*990*35mm	1390*990*35mm	1420*990*35mm
Weight	14.7Kg	15.4Kg	15.7Kg
Front Cover	3.2mm tempered glass		
Frame Material	Anodized aluminium alloy		
Junction Box	IP65 rated		
Output Cables	4mm ² , Length 900mm		
Connectors	MC4 comparable		

Dimensions

Unit: mm

Model No.	SW200P	SW205P	SW210P
A	1330	1390	1420
B	990	990	990
C	35	35	35
D	930	990	1020
E	200	200	200
F	952	952	952
G	4-ø9*14	4-ø9*14	4-ø9*14

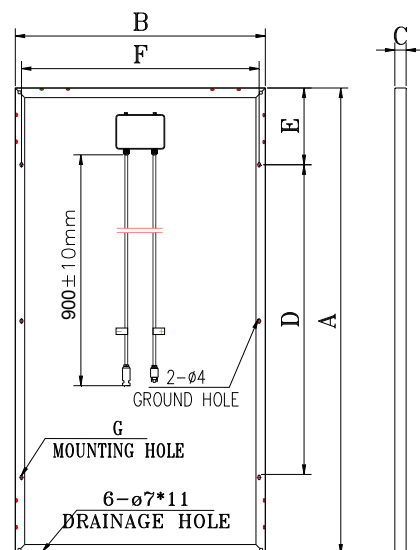

Packing

Model No.	SW200P	SW205P	SW210P
Packing method	Carton & Pallet	Carton & Pallet	Carton & Pallet
20'GP (Ref.)	464	406	406
40'GP (Ref.)	928	928	928

SUNWORTH SOLAR ENERGY CO., LTD

TEL: +86-769-2332 0882

Website: www.sun-worth.com

E-mail: sales@sun-worth.com