

**For a Free Quote:**

**Web: [EnergyPal.com/solar](http://EnergyPal.com/solar)**

**Call: 1-800-990-3725**

**Email: [contact@energypal.com](mailto:contact@energypal.com)**

# **EnergyPal**

## **Solar Panel Guide Specification Data Sheet**

**Tamrons Active International Limited**

**TMM355~380**

**TMM360-7**

Also available on the web at  
[EnergyPal.com/tamrons-active-international-limited-solar-panels/tmm360-7](http://EnergyPal.com/tamrons-active-international-limited-solar-panels/tmm360-7)

### Electrical Data

Model - STC		TMM355-7	TMM360-7	TMM365-7	TMM370-7	TMM375-7	TMM380-7
Maximum Rating Power (Pmax)	[W]	355	360	365	370	375	380
Module Efficiency	[%]	18.3	18.6	18.8	19.1	19.3	19.6
Open Circuit Voltage (Voc)	[V]	47.16	47.44	47.67	47.81	47.93	48.06
Maximum Power Voltage	[V]	38.63	39.01	39.38	39.40	39.45	39.55
Short Circuit Current (Isc)	[A]	9.70	9.77	9.84	9.91	9.96	10.11
Maximum Power Current	[A]	9.19	9.23	9.27	9.41	9.51	9.61

\*Standard Test Condition (STC): Cell Temperature 25 °C, Irradiance 1000 W/m<sup>2</sup>, AM 1.5  
\*Values without tolerance are typical numbers.

### Mechanical Data

Item	Specification
Dimensions	1956 mm (L) <sup>1</sup> x 992 mm (W) <sup>1</sup> x 35 mm (D) <sup>2</sup> / 77" (L) <sup>1</sup> x 39.1" (W) <sup>1</sup> x 1.38" (D) <sup>2</sup>
Weight	23 kg / 50.7 lbs
Solar Cell	72 monocrystalline 6" silicon cells
Front Glass	Anti-reflective tempered solar glass, 3.2mm thickness
Cell Encapsulation	EVA (Ethylene-Vinyl-Acetate)
Back Cover	Composite film, white
Junction Box	IP 67 rated
Frame	Anodized aluminum frame, original or black
Packaging Configuration	30 pcs Per Pallet, 660 pcs per 40' HQ container

### Operating Conditions


Item	Specification
Mechanical Load	5400 Pa (Certified by TUV Rheinland)
Maximum System Voltage	TUV 1000 VDC / UL 1500 VDC
Series Fuse Rating	15 A
Operating Temperature	-40 to 85 °C

### Temperature Characteristics


Item	Specification
Nominal Module Operating Temperature	44°C ± 2°C
Temperature Coefficient of Isc	0.06 % / °C
Temperature Coefficient of Voc	-0.28 % / °C
Temperature Coefficient of Pmax	-0.38 % / °C

\*Nominal module operating temperature (NMOT): Air mass AM 1.5, irradiance 800W/m<sup>2</sup>, temperature 20°C, windspeed 1 m/s.  
\*Reduction in efficiency from 1000W/m<sup>2</sup> to 200W/m<sup>2</sup> at 25°C: 3 ± 2%.

### Dependence on Irradiance

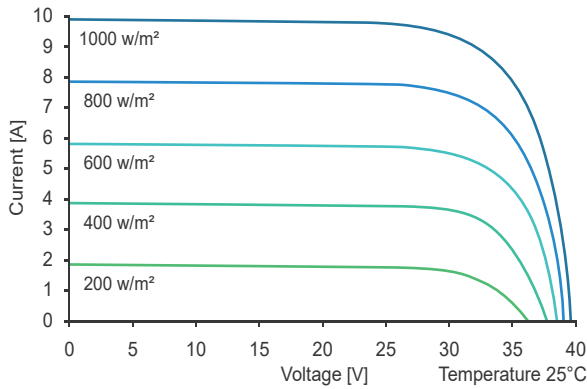


### Reliability with Warranty

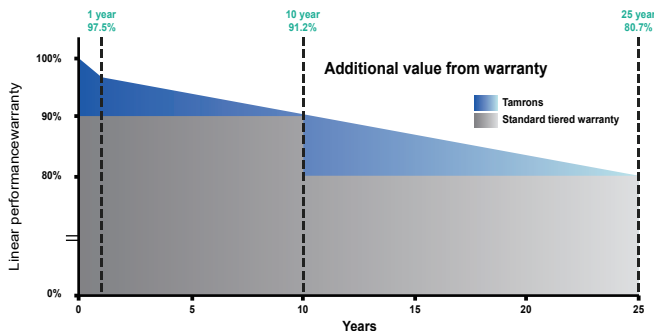

Output warranty  
**25**  
Years

Product Guarantee  
**10**  
Years

### Engineering Drawing (mm)

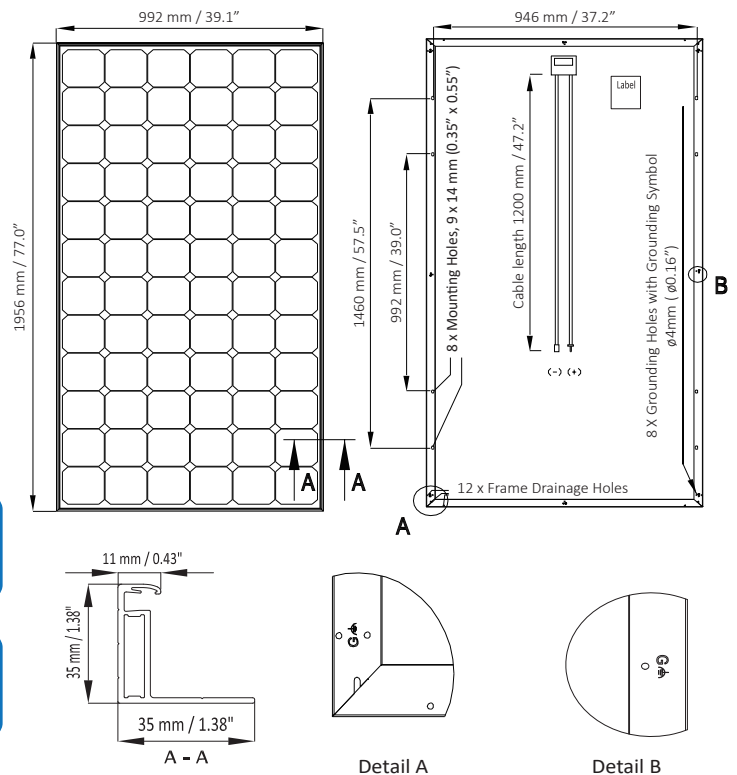

\* The datasheet is for informational purposes only and subject to change without prior notice. Copyright © 2018 TAMRONS All rights reserved.



Positive Power Tolerance +0 ~ +4.99 w



Withstand Heavy Loading  
Front load 5400 Pa & Rear Load 2400 Pa



Excellent Low Light Performance  
3.5% relative eff. reduction at low-irradiance (200w/m<sup>2</sup>)



**Tamrons Active International Limited**

web: www.tamrons.com; mail: sales@tamrons.com  
Production plants in China, Taiwan, Dubai and Thailand  
can meet the customer's needs and brand OEM

