

For a Free Quote:

Web: **EnergyPal.com/solar**

Call: **1-800-990-3725**

Email: **contact@energypal.com**

EnergyPal

Solar Panel Guide Specification Data Sheet


**TPL Energy Co., Limited
TPL M-72 Series 300W-325W
TPL300M-72**

Also available on the web at
EnergyPal.com/tpl-energy-co-limited-solar-panels/tpl300m-72



TPL SOLAR MODULE

TPL M-72 Series 300W-325W

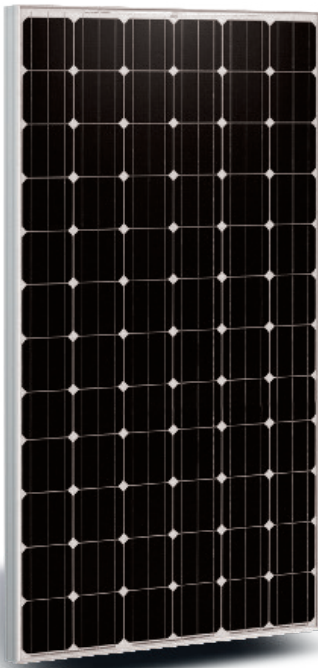

EU Brand & Warranty



High Efficiency

High module conversion efficiency (up to 16.8%), through innovative manufacturing technology.



Low-Light Performance

Advanced glass and solar cell surface texturing allow for excellent performance in low-light environments



Severe Weather Resilience

Certified to withstand : wind Load (2400 Pascal) And Snow Load (5400 Pascal)



4 Busbar Solar Cell

4 busbar solar cell adopts new technology to improve the efficiency of modules , offers a better aesthetic appearance.



Superior Quality Control

Full automatic production line
ISO9001:2008 quality management system
100% three times EL and appearance inspection



Plus tolerance

0-+5W positive power tolerance guarantees the highest system efficiency and yield stability



Performance Guarantee


With the linear performance guarantee of 30 years and a product warranty of 12 years, TPL Solar guarantees highest investment security and warranty claims.



Certificates

TPL Solar modules are CE and TUV certified. Meet Australia CEC standard and on CEC list. Fire safety Class C

Performance Assurance

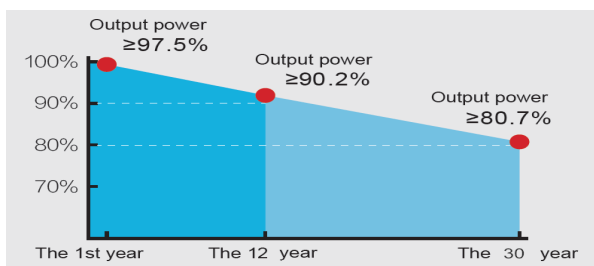

EN 61215:2005
EN 61730-1:2007/A2:2013
EN 61730-2:2007/A1:2012



TPL ENERGY CO., LIMITED
(TPL SOLAR)

E-Mail: info@tplsolar.com

Web: www.tplsolar.com

ELECTRICAL DATA

		TPL300M-72	TPL305M-72	TPL310M-72	TPL315M-72	TPL320M-72	TPL325M-72
Nominal power	P _m (Wp)	300	305	310	315	320	325
Open circuit voltage	V _{oc} (V)	45.14	45.25	45.36	45.45	45.55	45.65
Short-circuit current	I _{sc} (A)	8.51	8.58	8.62	8.67	8.72	8.75
Voltage at max power	V _{mp} (V)	37.66	38.03	38.32	38.61	38.89	39.17
Current at max power	I _{mp} (A)	7.97	8.02	8.09	8.16	8.23	8.30
Module efficiency	(%)	15.50	15.78	16.03	16.28	16.54	16.80
Cells efficiency	(%)	17.40	17.80	18.20	18.49	18.79	19.08
System Voltage	(V)	1000					
Temp. coefficient V _{oc}	(%; °C)	-0.36					
Temp. coefficient I _{sc}	(%; °C)	0.06					
Temp. coefficient P _m	(%; °C)	-0.36					
Operating temp.	(°C)	-40 to +85					
NOCT	(°C)	45±2					

The electrical data apply to standard test conditions (STC): Irradiance of 1000 W/m² with spectrum AM 1.5 and a cell temperature of 25°C.

TECHNICAL DATA

Junction box	3 bypass diodes, IP67
Wire cross section (Ø, mm ²)	4.0
Cable length (mm)	900
Connector type	MC4/MC4 compatible
Dimensions (L x W x H, mm)	1950 x 992 x 40
Weight (kg)	23.0
Cell dimensions (mm)	156 x 156
No of cells / assembly	72 / 6x12
Type of cells	mono-crystalline
Hail resistance	Max. Ø 28 mm at 23 m/
Wind load	2400Pa / 244kg / m ²
Mechanical load	5400Pa / 550kg / m ²

DIMENSIONS

