

For a Free Quote:

Web: **EnergyPal.com/solar**

Call: **1-800-990-3725**

Email: **contact@energypal.com**

EnergyPal

Solar Panel Guide Specification Data Sheet

Shenzhen Top Solar Energy Co., Ltd.


TS-S250M

TS-S250M

Also available on the web at
EnergyPal.com/shenzhen-top-solar-energy-co-ltd-solar-panels/ts-s250m

MONOCRYSTALLINE SOLAR PANEL

TS-S250M

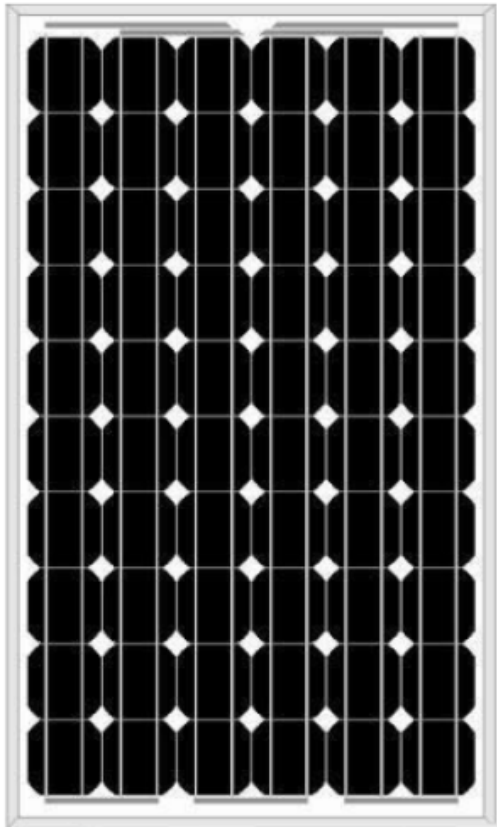


- High conversion efficiency
- Extremely environmental testing
- Salt mist corrosion resistant
- IP67 Junction box
- Strong compressive strength
- Fire test approved
- PID Resistant

GIVING YOU MORE

- 3% positive tolerance
- Authorised photovoltaic certificates

- Series of internal harsh tests
- Linear performance warranty

Top Solar was established in 2008 and is a hi-tech corporation with its core business in R&D, manufacturing and sale of high efficiency solar panel.

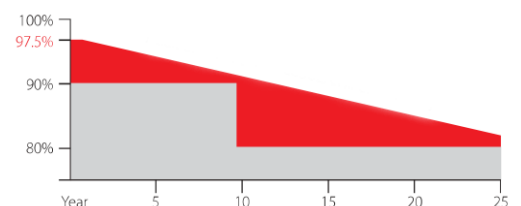

www.topsolar-energy.com


Shenzhen Top Solar Energy Co.,Ltd.
F4,Building C,Zhonghengxinda Industrial Park,
Shajing Town,Baoan District,Shenzhen City,Guangdong Province,China
Tel:86 755 85224431 Fax:86 755 28167996 Email:info@topsolar-energy.com

Electrical Characteristics under STC*

Model No.:	TS-S250M
Maximum Power-Pmax(Wp)	250W
Voltage at Maximum Power-Vmp(V)	31.65V
Current at Maximum Power-Imp(A)	7.9A
Open Circuit Voltage-Voc(V)	37.37V
Short Circuit Current-Isc(A)	8.45A
Solar Panel Efficiency(%)	15.4
Power Tolerance(%)	0/+3

Mechanical Characteristics

Cell Type	Monocrystalline	156*156mm
Number of Cells	60(6*10)	
Dimension	1640*990*40mm	
Weight	18.6kg	
Front Glass	Low Iron Tempered Glass	
Encapsulant	EVA	
Frame	Anodized Aluminum Alloy	

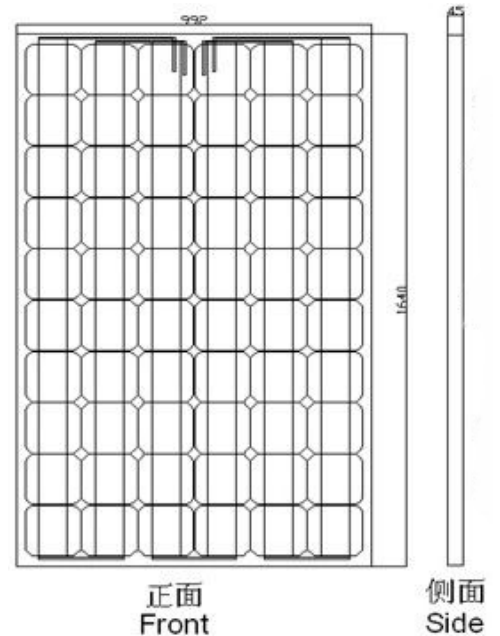

Temperature Characteristics



NOCT*	45±2°C
Temperature Coefficient of Pmax(%)	-0.40/°C
Temperature Coefficient of Voc(%)	-0.31/°C
Temperature Coefficient of Isc(%)	0.04/°C

Maximum System Ratings

Operating Temperature	-40°C to +85°C
Maximum System Voltage	1000V DC
Maximum Series Fuse Rating	15A

Warranty

- 12 years product warranty
- 12 years warranty on 90% power output
- 25 years warranty on 80% power output

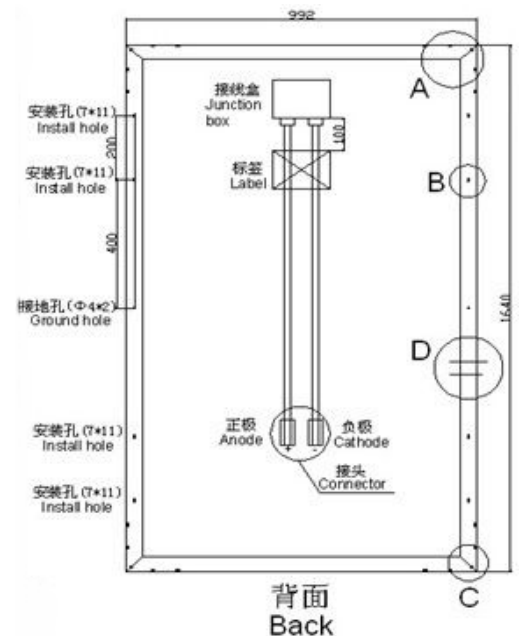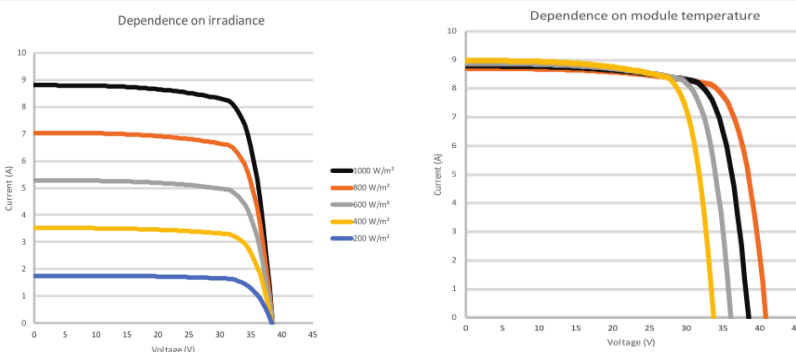

*STC(Standard Testing Conditions):Irradiance 1000W/m²,cell temperature 25°C,AM=1.5 *NOCT(Nominal Operating Cell Temperature):Irradiance 800W/m², ambient temperature 20°C,wind speed 1m/s

The specifications in this datasheet are subjected to change without prior notice