

**For a Free Quote:**

**Web: [EnergyPal.com/solar](http://EnergyPal.com/solar)**

**Call: 1-800-990-3725**

**Email: [contact@energypal.com](mailto:contact@energypal.com)**

# **EnergyPal**

## **Solar Panel Guide Specification Data Sheet**

**Zhejiang Beyondsun Holding Co., Ltd.  
HPower TSM-72 360-385W  
TSM380-72**

Also available on the web at  
[EnergyPal.com/zhejiang-beyondsun-holding-co-ltd-solar-panels/tsm380-72](http://EnergyPal.com/zhejiang-beyondsun-holding-co-ltd-solar-panels/tsm380-72)






PERC Technology

# Hpower Series TSM-72




Trunsun High Efficiency Monocrystalline Solar Module  
with Perc Technology

360-385W

-  **Higher Module Efficiency**  
10% more power than standard modules, due to advanced the PERC technology
-  **More Energy Yield**  
Better temperature coefficient, helps boost energy yield
-  **Approved Technology**  
Approved practice for different operating conditions
-  **Lower Operation Temperature**  
Less hot spot heating risk, make the module more reliable
-  **Aesthetic Design**  
Uniformity appearance, aesthetic design with black frame option



## LINEAR PERFORMANCE WARRANTY

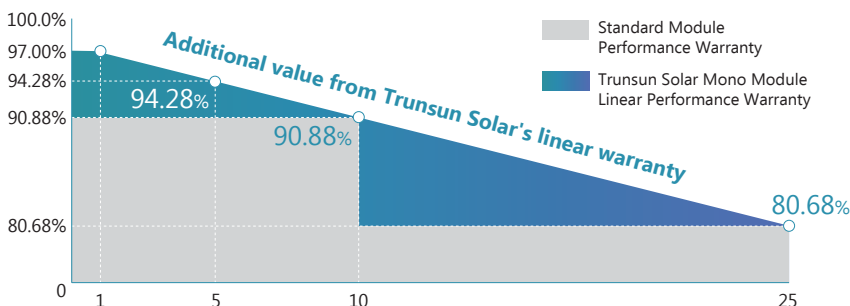

**12years** Product Material & Workmanship

**25years** Linear Performance Warranty

### About Trunsun Solar

Trunsun Solar, established in 2008, is dedicated to providing solar products with high quality, excellent performance and strong after-sales support. The company not only has strong financial support but also never stops innovating. Trunsun Solar will keep delivering the diversified solar products for all kinds of renewable energy generation systems around the world.

# Hpower Series TSM-72 Trunsun High Efficiency Monocrystalline Solar Module with Perc Technology

ELECTRICAL DATA @ STC*		TSM360-72	TSM365-72	TSM370-72	TSM375-72	TSM380-72	TSM385-72
Peak Power (Pmax)	(W)	360	365	370	375	380	385
Maximum Power Voltage (Vmp)	(V)	39.26	39.55	39.83	40.11	40.39	40.66
Maximum Power Current (Imp)	(A)	9.17	9.23	9.29	9.35	9.41	9.47
Open-circuit Voltage (Voc)	(V)	47.61	47.90	48.17	48.43	48.72	48.99
Short-circuit Current (Isc)	(A)	9.92	9.99	10.06	10.13	10.19	10.25
Module Efficiency	(%)	18.57	18.83	19.09	19.35	19.60	19.86
Operating Temperature		-40°C~+85°C					
Maximum System Voltage		1000V					
Maximum Series Fuse Rating		15A					
Application Class		Class A					
Power Tolerance		0~+3%					

\*STC (Standard Test Condition): Irradiance 1000W/ m<sup>2</sup>, Module Temperature 25°C, AM 1.5

ELECTRICAL DATA @ NMOT*		TSM360-72	TSM365-72	TSM370-72	TSM375-72	TSM380-72	TSM385-72
Peak Power (Pmax)	(W)	267	271	274	278	282	285
MPP Voltage (Vmp)	(V)	36.15	36.42	36.68	36.93	37.19	37.69
MPP Current (Imp)	(A)	7.38	7.43	7.48	7.53	7.58	7.55
Open Circuit Voltage (Voc)	(V)	44.91	45.18	45.44	45.68	45.96	46.26
Short Circuit Current (Isc)	(A)	8.01	8.07	8.13	8.18	8.23	8.27

\*Under Nominal Module Operating Temperature (NMOT), Irradiance of 800W/ m<sup>2</sup>, Spectrum AM 1.5, Ambient Temperature 20°C, Wind Speed 1m/s

TEMPERATURE CHARACTERISTICS		
Temperature coefficient of Pmax		-0.40%/°C
Temperature coefficient of Voc		-0.31%/°C
Temperature coefficient of Isc		0.05%/°C
NMOT		42±3°C


MECHANICAL DATA		
Cell Type		Mono-Crystalline, 6" inch
Cell Arrangement		72pcs (6×12)
Dimension (L×W×H)		1956×991×35mm
Weight		21.5kg
Front Cover		3.2mm Tempered Glass
Frame		Anodized Aluminium Alloy
Junction Box		IP67, 3 Bypass Diodes
Cable Type		4mm <sup>2</sup>
Length of Cable		1200mm
Connector		PV Connector

PACKING MANNER		
Packing Type		40HQ
Piece/Pallet		30
Pallet/Container		24
Piece/Container		720




\*The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, Zhejiang Trunsun Solar Co., Ltd. Reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.

\*Power measurement tolerance: ±3%

**Current-Voltage Curve under different irradiance**

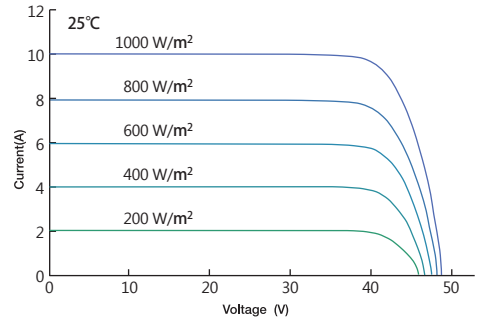

**Current-Voltage Curve under different working temperatures**

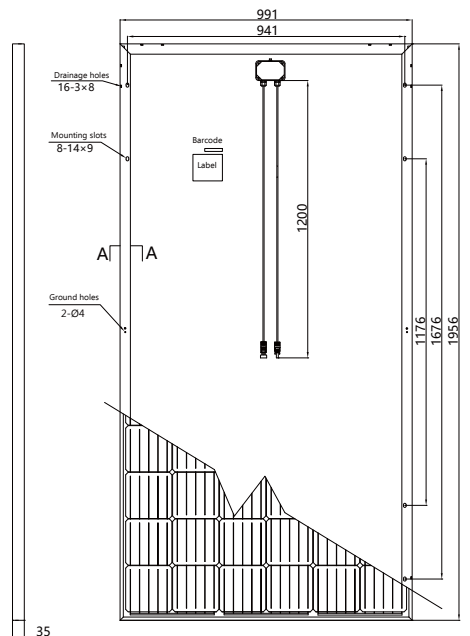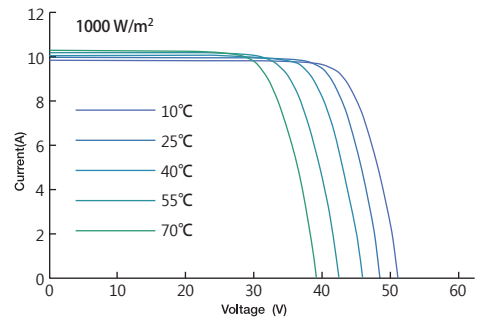

Section A-A

Dimension (unit: mm)

Version 2019.04 © Zhejiang Trunsun Solar Co., Ltd All Rights Reserved.