

For a Free Quote:

Web: **EnergyPal.com/solar**

Call: **1-800-990-3725**

Email: **contact@energypal.com**



**Solar Panel Guide
Specification Data Sheet**

**Tommatech GmbH
TT325-335-60PM
TT330 60PM**

Also available on the web at
EnergyPal.com/tommatech-gmbh-solar-panels/tt330-60pm

PERC MONOCRYSTALLINE 60PM



GERMAN-based company

◆ TT335-60PM 335 Wp

◆ TT330-60PM 330 Wp

◆ TT325-60PM 325 Wp

12 Year
Material and
Workmanship
Warranty

25 Years
Performance Warranty



High Conversion Efficiency

High panel efficiency to guarantee high power output



Self-Cleaning And Anti-Reflection Glass

Coating glass for self-cleaning reduces surface dust



Outstanding Low Irradiation Glass

Outstanding panel performance even in weak light conditions



Excellent Durability


Wind load up to 2400 Pa, Snow load up to 5400 Pa




0~+5W Positive Power Tolerance



Easy Installation

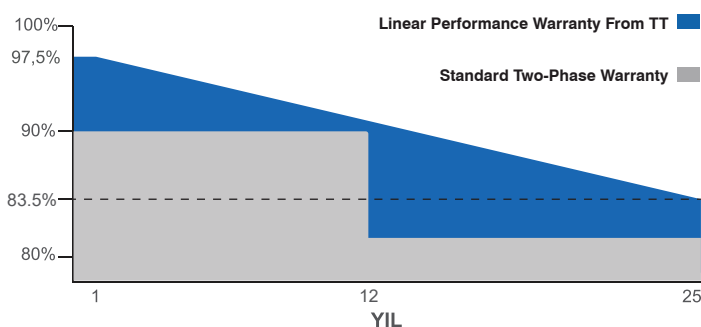

✓ 25 Year Performance Warranty ✓ 12 Year Material and Workmanship Warranty

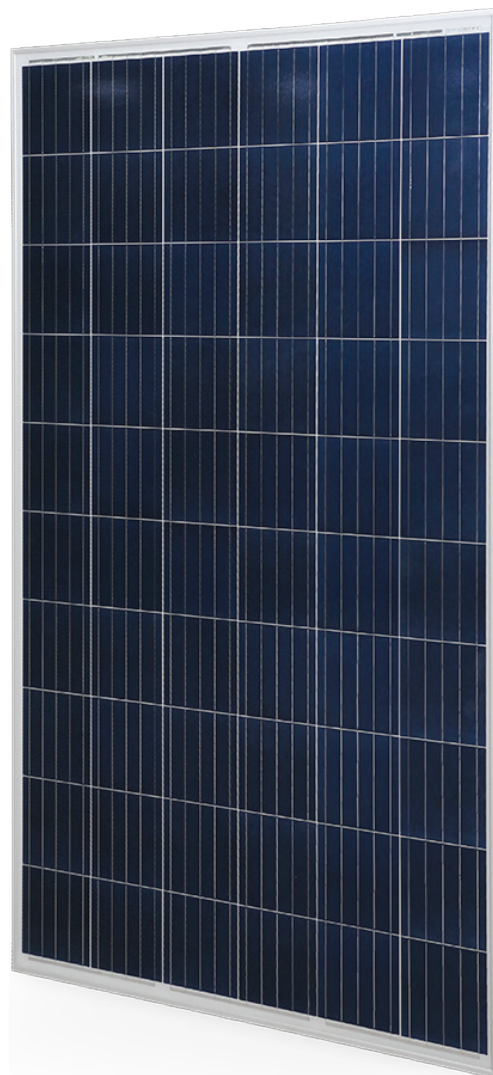

Model Type	TT325 60PM	TT330 60PM	TT335 60PM
Peak Power (Pmax)	325 Wp	330 Wp	335Wp
Module Efficiency	19,35	19,65	19,94
Maximum Power Voltage (Vmp)	34,20	34,50	34,74
Maximum Power Current (Imp)	9,51	9,59	9,66
Open Circuit Voltage (Voc)	39,60	40,20	40,50
Short Circuit Current (Isc)	10,02	10,10	10,11
Power Tolerance	0~+5W		
Maximum System Voltage	1000V DC /1500V DC		
Nominal Operating Cell Temp.	-40 ~ +85°C		
Fire Safety	Class C		
Maximum Series Fuse Rating	15A / 20A		

MECHANICAL SPECIFICATIONS

Cell Dimensions	158,75 mm x 158,75 mm
Cells per Module	60 (6X10)
Weight	18
Panel Dimensions	1668x1007x35mm
Max. Wind/Snow Load	2400/5400 Pa
Junction Box	IP67

TEMPERATURE CHARACTERISTICS

Temp. Coeff. of (Isc)	0.048%/°C
Temp. Coeff. of (Voc)	-0.28%/°C
Temp. Coeff. of (Pmax)	-0.37%/°C


PACKING CONFIGURATION

Container	20' GP	40' GP
Pieces per Pallet	31	31
Pieces per Container	372	938

PHYSICAL CHARACTERISTICS


A (1:4)

Birim: mm

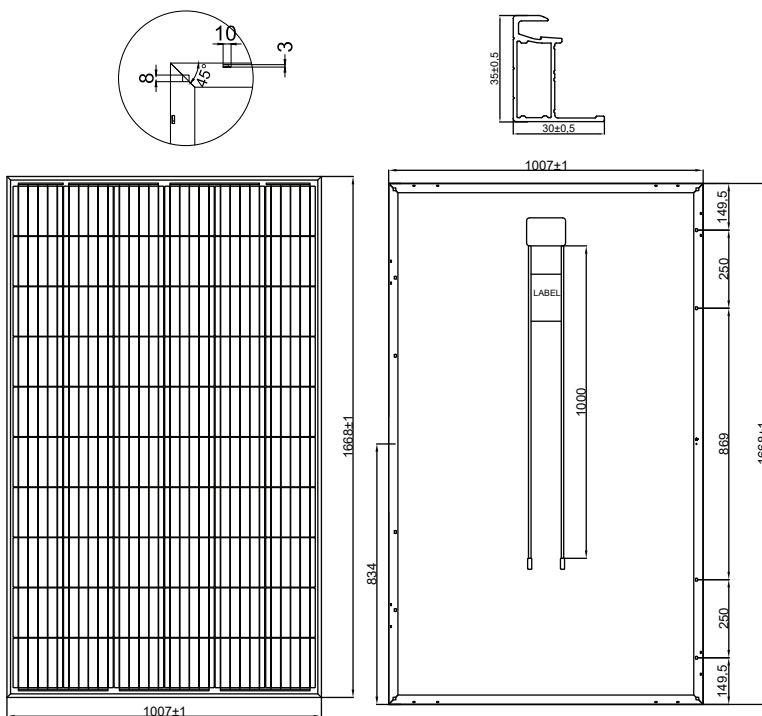


ELECTRICAL CHARACTERISTICS

Temperature Dependence of Isc, Voc and Pmax

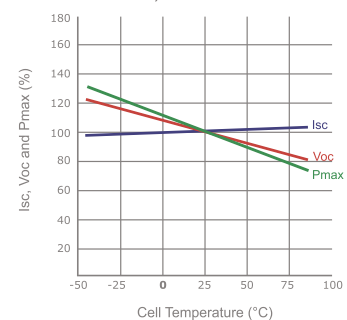

Irradiance Dependence of Isc, Voc and Pmax

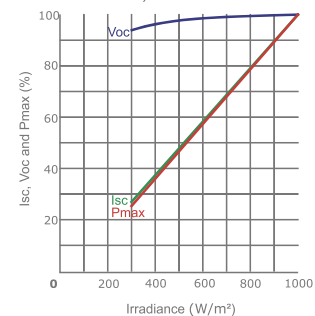

*Note: The specifications are obtained under the standard test conditions: 1000W/m² solar irradiance, 1.5 Air Mass and cell temperature of 25°C. The NOCT is obtained under the Test Conditions 800W/m² solar radiation, ambient temperature 20°C, wind speed 1m/s. Measurement uncertainty for all panels is 6%. The actual transactions will be subject to the contracts. These parameters are for reference only and it is not a part of the contracts. The specifications are subject to change without prior notice.