

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet

Tommatech GmbH

TT320-335-72P

TT330 72P

Also available on the web at
EnergyPal.com/tommatech-gmbh-solar-panels/tt330-72p

POLYCRYSTALLINE 72P



GERMAN-based company

- ◆ TT320-72P 320 Wp
- ◆ TT330-72P 330 Wp
- ◆ TT325-72P 325 Wp
- ◆ TT335-72P 335 Wp



High Conversion Efficiency

High panel efficiency to guarantee high power output



Self-Cleaning And Anti-Reflection Glass

Coating glass for self-cleaning reduces surface dust



Outstanding Low Irradiation Glass

Outstanding panel performance even in weak light conditions



Excellent Durability



Wind load up to 2400 Pa, Snow load up to 5400 Pa



0~+5Wp Positive Power Tolerance



Easy Installation

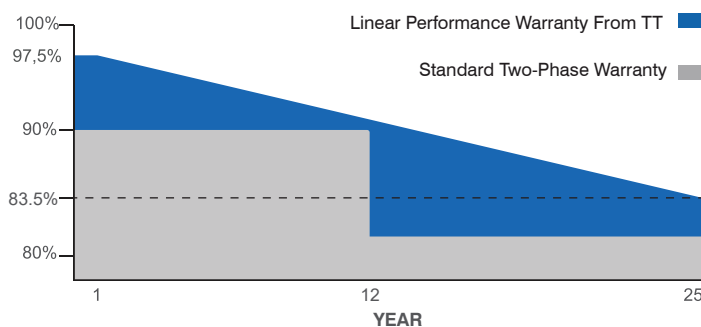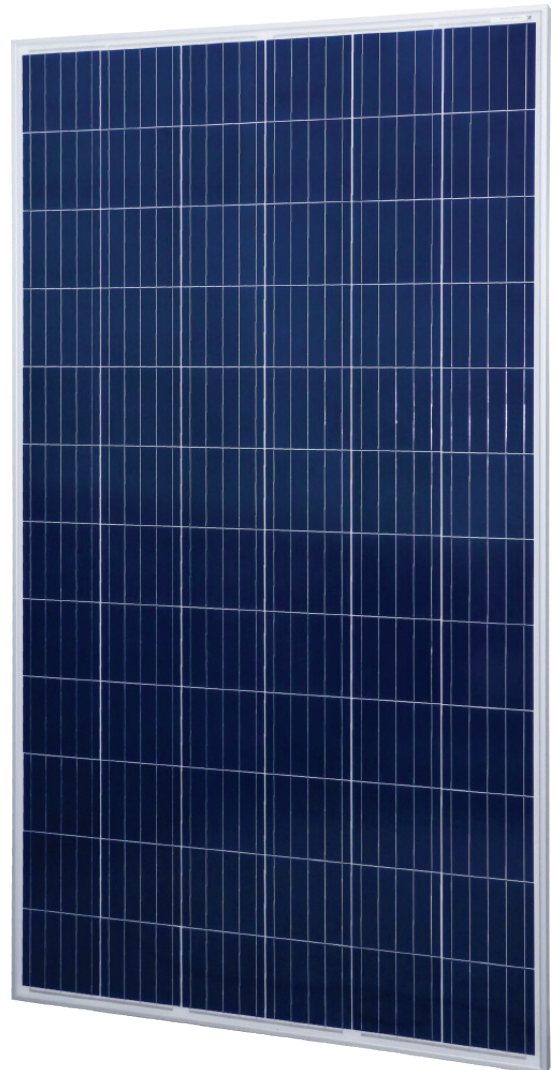

- ✓ 25 Year Performance Warranty
- ✓ 12 Year Material and Workmanship Warranty



IEC 61215, IEC 61730, IEC 62804 (PID-Free)
IEC 62716, IEC 61701
IEC 6006-2-68

Model Type	TT320 72P	TT325 72P	TT330 72P	TT335 72P
Peak Power (Pmax)	320 Wp	325 Wp	330 Wp	335 Wp
Module Efficiency	16,42	16,67	16,93	17,19
Maximum Power Voltage (Vmp)	37,70	37,90	38,10	38,30
Maximum Power Current (Imp)	8,49	8,58	8,67	8,75
Open Circuit Voltage (Voc)	46,40	46,80	47,30	47,70
Short Circuit Current (Isc)	9,04	9,14	9,24	9,31
Power Tolerance	0~+5W			
Maximum System Voltage	1000V DC			
Nominal Operating Cell Temp.	-40 ~ +85°C			
Fire Safety	Class C			
Maximum Series Fuse Rating	15A			

MECHANICAL SPECIFICATIONS

Cell Dimensions	156,75 mm x 156,75 mm
Cells per Module	72 (6X12)
Weight	22 kg
Panel Dimensions	1959x995x40mm
Panel Dimensions (Optional)	1956x990x50mm
Max. Wind/Snow Load	2400/5400 Pa
Junction Box	IP67

TEMPERATURE CHARACTERISTICS


Temp. Coeff. of (Isc)	0.06%/°C
Temp. Coeff. of (Voc)	-0.31%/°C
Temp. Coeff. of (Pmax)	-0.38%/°C

PACKING CONFIGURATION



Container	20' GP	40' GP
Pieces per Pallet	27	27
Pieces per Container	270	696

PHYSICAL CHARACTERISTICS

Unit: mm

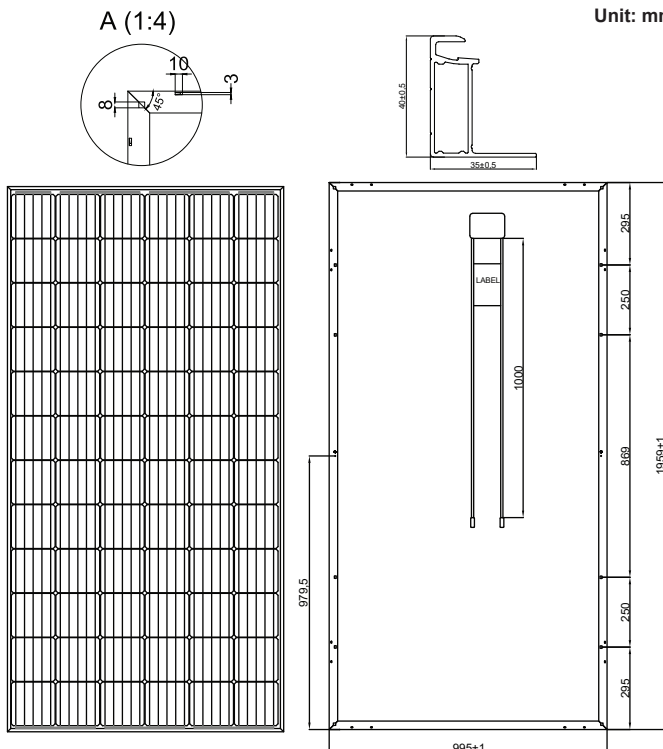

ELECTRICAL CHARACTERISTICS

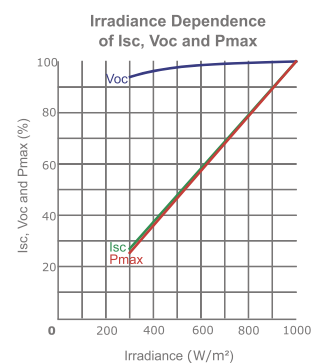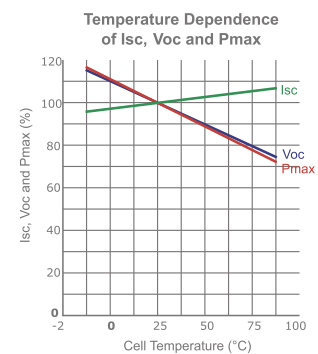

*Note: The specifications are obtained under the standard test conditions: 1000W/m² solar irradiance, 1.5 Air Mass and cell temperature of 25°C. The NOCT is obtained under the Test Conditions 800W/m² solar radiation, ambient temperature 20°C, wind speed 1m/s. Measurement uncertainty for all panels is 6%. The actual transactions will be subject to the contracts. These parameters are for reference only and it is not a part of the contracts. The specifications are subject to change without prior notice.