

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet

Zhejiang TTN Electric Co., Ltd.


TTN-165-180M36

TTN-M175W-36

Also available on the web at
EnergyPal.com/zhejiang-ttn-electric-co-ltd-solar-panels/ttn-m175w-36

TTN-165-180M36

Monocrystalline Solar Module

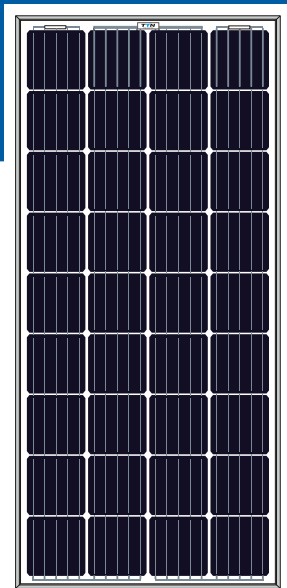

APPLICATIONS

- Large terrestrial power station
- Industrial and commercial roof power generation
- Residential roof
- Off grid solar power system




36 CELL Series

10 YEAR Product Warranty

25 YEARS Linear Warranty

Premium Performance Warranty

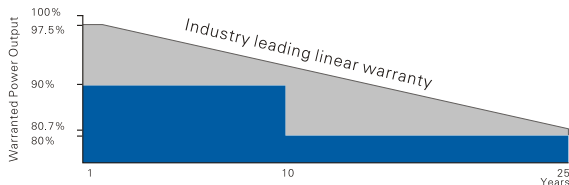


Electrical data




	165Wp	170Wp	175Wp	180Wp
Nominal Power Watt Pmax(Wp)	165Wp	170Wp	175Wp	180Wp
Power Output Tolerance Pmax(W)	0/+5	0/+5	0/+5	0/+5
Maximum Power Voltage Vmp(V)	18.86V	19.04V	19.15V	19.53V
Maximum Power Current Imp(A)	8.75A	8.93A	9.14A	9.22A
Open Circuit Voltage Voc(V)	23.47V	23.61V	23.71V	24.09V
Short Circuit Current Ioc(A)	9.16A	9.31A	9.51A	9.61A
Module Efficiency η (%)	16.75%	17.26%	17.76%	18.27%
Maximum system voltage	1000V			
Operating temperature	-40°C to +85°C			
NOCT	45°C \pm 2°C			
Temperature coefficient of Isc	+0.05%/°C			
Temperature coefficient of Voc	-0.34%/°C			
Temperature coefficient of Pm	-0.42%/°C			

Specifications included in this datasheet are subject to change without prior notice

Dimensions

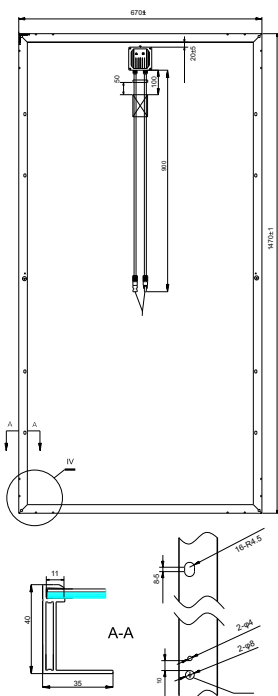

Curve chart



Mechanical data

Solar cells	Mono 156x156mm
Cells orientation	36(4x9)
Module dimension	1470mmx670mmx35mm
Weight	11.5kg
Glass	High transparency, low iron, tempered glass 3.2mm(AR-coating)
Junction box	8Ax9 diodes
Cables	2.5mm ² , 900mm
Connectors	MC4-compatible

Established in 1994