

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal



Solar Panel Guide Specification Data Sheet

**Shandong Tansins Photovoltaic New Energy Co.,
Ltd.**



TX250-275 60M

TX255-60M

Also available on the web at
EnergyPal.com/shandong-tansins-photovoltaic-new-energy-co-ltd-solar-panels/tx255-60m

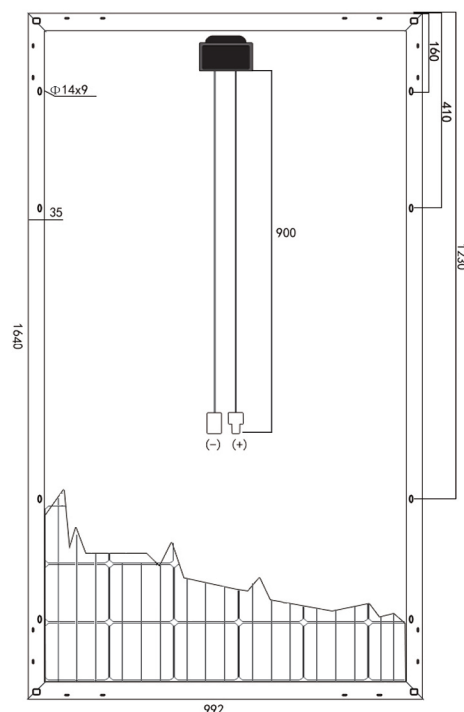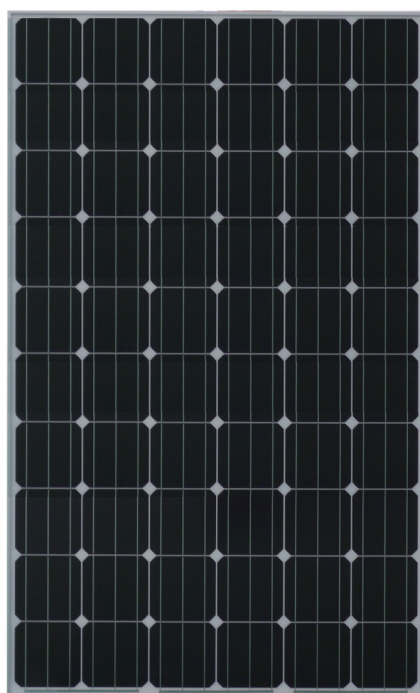

Unit:mm

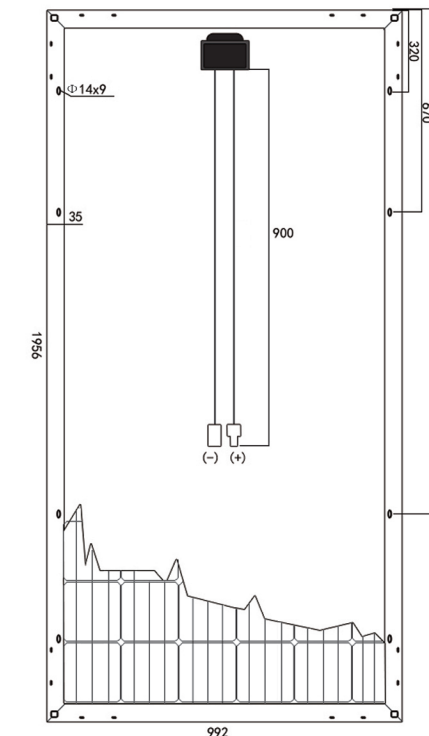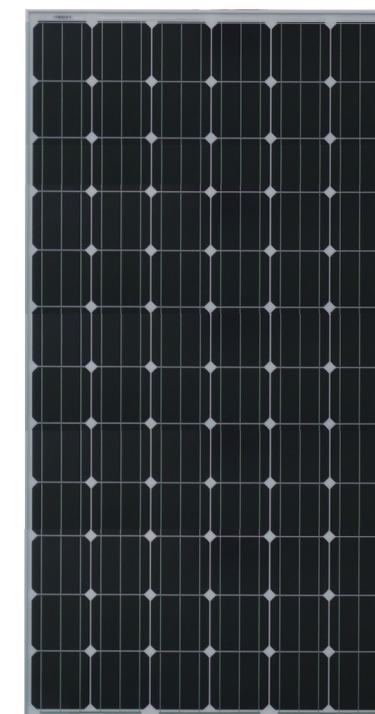

Unit:mm

156*156单晶组件 156*156 Monocrystalline Module (60片)

156*156单晶组件 156*156 Monocrystalline Module (72片)

组件尺寸	Module Size	1640*992*40/35					
组件重量	Module Weight	19.5kg (43lb)					
类型	Type	TX250-60M	TX255-60M	TX260-60M	TX265-60M	TX270-60M	TX275-60M
功率	Power	250	255	260	265	270	275
最大工作电压	Maximum Operating Voltage	31.26	31.62	31.62	32.18	32.46	32.78
最大工作电流	Maximum Operating Current	7.98	8.07	8.17	8.23	8.30	8.38
开路电压	Open-circuit Voltage	37.50	37.62	37.80	38.02	38.10	38.34
短路电流	Short-circuit Current	8.58	8.69	8.76	8.78	8.78	8.80
最大系统电压	Maximum System Voltage	DC1000V					
正常工作温度	Normal Operating Temperature	45±2℃					
工作温度范围	Operating Temperature Range	-40℃—85℃					
功率温度系数	Temperature coefficient of Power	-0.40%/℃ (-0.22%/°F)					
电压温度系数	Temperature coefficient of Voc	-0.32%/℃ (-0.18%/°F)					
电流温度系数	Temperature coefficient of Isc	0.05%/℃ (-0.028%/°F)					
包装配置和每托盘数量	Packing Configuration and Quantity per Pallet	26/29 pcs per carton and two carton per pallet					
集装箱装载量	Container Loading Capacity	784/868 pcs per 40 ft high cubic container					

以上电性能参数是在标准测试条件下测得,即太阳辐照度1000W/M²,太阳光谱AM1.5,测试温度25摄氏度

组件尺寸	Module Size	1956*992*50/40mm					
组件重量	Module Weight	22.5kg (49.6lb)					
类型	Type	TX305-72M	TX310-72M	TX315-72M	TX320-72M	TX325-72M	TX330-72M
功率	Power	305	310	315	320	325	330
最大工作电压	Maximum Operating Voltage	37.87	38.09	38.37	38.67	39.03	39.42
最大工作电流	Maximum Operating Current	8.07	8.13	8.22	8.28	8.33	8.37
开路电压	Open-circuit Voltage	45.10	45.30	45.43	45.58	45.79	45.85
短路电流	Short-circuit Current	8.70	8.78	8.87	8.90	8.96	8.99
最大系统电压	Maximum System Voltage	DC1000V					
正常工作温度	Normal Operating Temperature	45±2℃					
工作温度范围	Operating Temperature Range	-40℃—85℃					
功率温度系数	Temperature coefficient of Power	-0.40%/℃ (-0.22%/°F)					
电压温度系数	Temperature coefficient of Voc	-0.32%/℃ (-0.18%/°F)					
电流温度系数	Temperature coefficient of Isc	0.05%/℃ (-0.028%/°F)					
包装配置和每托盘数量	Packing Configuration and Quantity per Pallet	21/25 pcs per carton and two carton per pallet					
集装箱装载量	Container Loading Capacity	598/702 pcs per 40 ft high cubic container					

以上电性能参数是在标准测试条件下测得,即太阳辐照度1000W/M²,太阳光谱AM1.5,测试温度25摄氏度