

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet

Venergy Solar Industry Company Limited

VES-6MA-HV 335-350W

VES-340-6MA-HV

Also available on the web at
EnergyPal.com/venergy-solar-industry-company-limited-solar-panels/ves-340-6ma-hv



335-350W



MANAGEMENT SYSTEM

- ISO 9001: Quality management system
- ISO 14001: Standard for environmental management system
- OHSAS 18001: International standard for occupational health and safety assessment system


PRODUCT CERTIFICATES



INSURANCE



WARRANTY

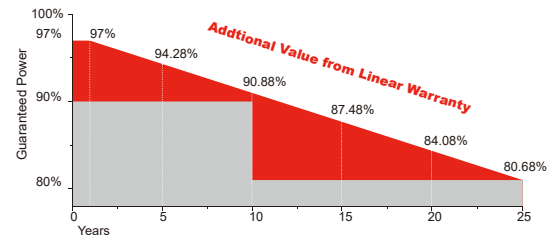

10 YEARS Guarantee on product material and workmanship | **25 YEARS** linear power output warranty

Safety

- 1500V** Withstand and applicable up to 1500V high system voltage
- NEW -IEC-** Tested and certified according to newest IEC standard IEC61730-1:2016 IEC61730-2:2016
- G** Class C fire safety class

Reliability

- NEW -IEC-** Tested and certified according to newest IEC standard IEC61215:2016
- 1st** World 1st company to pass "Thresher Test" and "On-site Power Measurement Validation" certificate
- \$/€/£ BANKABLE** Bankable products

Performance

- Advanced** Outstanding power output capability at low irradiance
- Triple 100%** Electroluminescence (EL) tests minimize breakage rate
- Photon LABORATORY TOP** Top rank in Photon yield measurement

VES-6MA-HV SERIES 6 INCH 72 CELLS



*BLACK FRAME / BLACK BACK-SHEET PRODUCTS ARE AVAILABLE UPON REQUEST.

Electrical Characteristics(STC)

Module Type	VES-335-6MA-HV	VES-340-6MA-HV	VES-345-6MA-HV	VES-350-6MA-HV
Maximum Power at STC - P_{mp} (W)	335	340	345	350
Open Circuit Voltage - V_{oc} (V)	46.4	46.6	46.8	47
Short Circuit Current - I_{sc} (A)	9.23	9.32	9.43	9.51
Maximum Power Voltage - V_{mp} (V)	37.5	37.7	37.9	38.1
Maximum Power Current - I_{mp} (A)	8.94	9.02	9.11	9.19
Module Efficiency STC- η_m (%)	17.14	17.40	17.65	17.91

STC: Irradiance 1000 W/m² module temperature 25°C AM=1.5

Power measurement tolerance: +/-3%

Electrical Characteristics(NOCT)

Module Type	VES-335-6MA-HV	VES-340-6MA-HV	VES-345-6MA-HV	VES-350-6MA-HV
Maximum Power at NOCT - P_{mp} (W)	249	252	256	260
Open Circuit Voltage - V_{oc} (V)	42.8	43	43.2	43.4
Short Circuit Current - I_{sc} (A)	7.53	7.59	7.68	7.68
Maximum Power Voltage - V_{mp} (V)	35.3	35.5	35.6	35.8
Maximum Power Current - I_{mp} (A)	7.05	7.10	7.19	7.27

NOCT: Irradiance 800 W/m² ambient temperature 20°C wind speed :1m/s

Power measurement tolerance: +/-3%

Power Tolerance (W)	(0,+4.99)
Maximum System Voltage (V)	1500 (TÜV)
Maximum Series Fuse Rating (A)	20

Temperature Characteristics



Pmax Temperature Coefficient	-0.40 %/°C
Voc Temperature Coefficient	-0.32 %/°C
Isc Temperature Coefficient	+0.05 %/°C
Operating Temperature	-40~+85 °C
Nominal Operating Cell Temperature (NOCT)	45±2 °C

Packing Configuration

	1970 x 992 x 40mm	
Container	20'GP	40'GP
Pieces per Pallet	27	27
Pallets per Container	10	22
Pieces per Container	270	594

Mechanical Specifications

External Dimensions	1970 x 992 x 40 mm
Weight	23 kg
Solar Cells	Mono crystalline 156.75 x 156.75 mm (72pcs)
Front Glass	3.2 mm tempered glass, low iron
Frame	Anodized aluminium alloy
Junction Box	IP67
Output Cables	4.0 mm ² ,cable length:1100 mm
Connector	MC4 compatible
Mechanical Load	5400 Pa

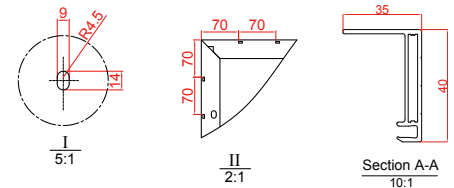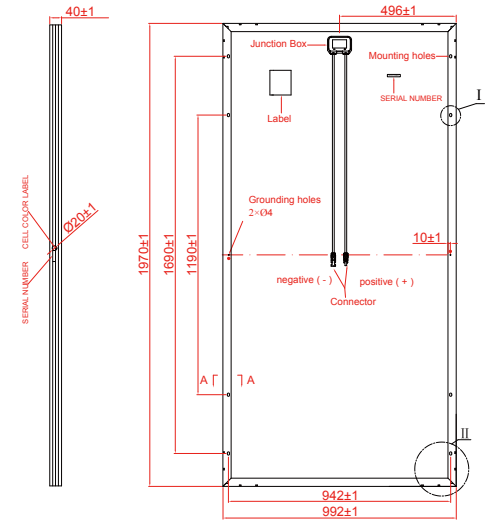

* All Dimensions in mm

* The above drawing is a graphical representation of the product. For engineering quality drawings please contact VENERGY.

I-V Curve(VES-335-6MA-HV)

