For a Free Quote:

Web: EnergyPal.com/solar

Call: **1-800-990-3725** 

Email: contact@energypal.com




Solar Panel Guide Specification Data Sheet

Waaree Energies Ltd
Aditya Series WSM-260-300
WSM-260

### **ADITYA SERIES MONO**

WSM-260 to WSM-300 (60 Cells)









PID Free Modules with long term reliability

Glass with Anti Reflective Coating Improves light transmission









to reduce the BOS cost

Modules binned by current to improve system performance




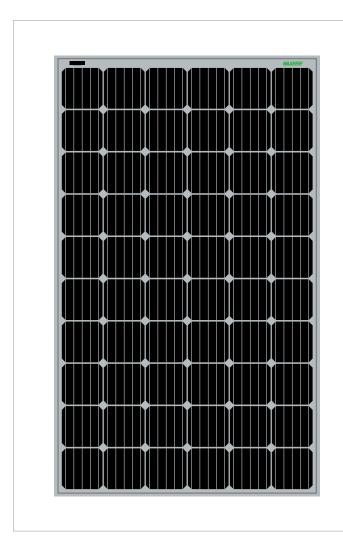

### I-V Curve Variation With Irradiance



#### I-V Curve Variation With Temperature



The Graphs are for reference purpose only. Please consult Waaree technical team for further clarifications.

# INTERNATIONAL & NATIONAL CERTIFICATIONS

IS 14286 | IEC 61215 | IEC 61730 | IEC 61701 | IEC 62804 IEC 62716 | IEC 60068-2-68 | UL1703 ROHS Compliance | REACH Compliance



IS 14286/IEC 61215 ed2 IS/IEC 61730(PART1&2)







## **ADITYA SERIES MONO**

WSM-260 to WSM-300 (60 Cells)




### **Electrical Characteristics**

Models	Pmax (W)	Vmp (V)	Imp (A)	Isc (A)	Voc (V)	Module Eff. (%)
WSM-260	260	31.35	8.30	8.65	38.90	16.01
WSM-265	265	31.55	8.40	8.80	39.00	16.32
WSM-270	270	31.80	8.50	8.95	39.10	16.63
WSM-275	275	32.00	8.60	9.10	39.20	16.94
WSM-280	280	32.10	8.75	9.25	39.30	17.25
WSM-285	285	32.25	8.85	9.35	39.40	17.55
WSM-290	290	32.45	8.95	9.45	39.50	17.86
WSM-295	295	32.60	9.05	9.55	39.60	18.17
WSM-300	300	32.70	9.20	9.70	39.70	18.48

<sup>\*</sup> Mentioned electrical data are reference values which was derived at STC condition - Temp: 25°, Irradiance: 1000w/m2 and Am: 1.5Am with cleaned modules

### **Design Specifications**

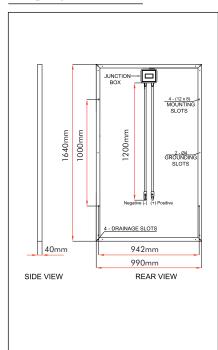

### **Mechanical Characteristics**

Length x Width x Thickness (L x W x T) - mm	1640 x 990 x 40
Mounting Holes Pitch (Y) – mm	1000.00
Mounting Holes Pitch (X) – mm	942
Weight (kg)	18.5
Solar Cells per Module (Units) / Arrangement	60 / (10 x 6)
Solar Cell Type	Mono PERC
Front Cover (Material / Thickness)	Tempered & Low Iron Glass, 3.2/4mm
Encapsulate	Ethylene Vinyl Acetate
Frame Material	Anodized Aluminum Alloy
Junction Box (Protection degree / Material)	IP67 rated enclosure with 3 bypass
	diodes. Rated voltage : 1500VDC
Connector	MC4 compatible with IP67 rated
Cable	4 mm <sup>2</sup> cross section, 1200 mm long
Fire safety class	С
Application class	A
Safety class	П

#### **Temperature Coefficients And Operating Conditions**

Temperature coefficient of Current α (%/°C)	0.0039
Temperature coefficient of Voltage ß (%/°C)	-0.2627
Temperature coefficient of Power γ (%/°C)	-0.3739
NOCT (°C)	46 ± 2
Operating Temperature Range (°C)	-40 to 85
Maximum System Voltage (IEC& UL)	1500VDC

Waaree Energies Ltd. is the flagship company of Waaree Group, and has the country's largest Solar PV Module manufacturing capacity of 1.5 GW. In addition, it is one of leading players in India in EPC Services, Project Development, Rooftop Solutions, Energy Storage, Inverters, Solar Thermal, Solar Water Pumps and as an Independent Power Producer. Waaree has its presence in over 280+ locations nationally and 68 countries globally.

- The electrical data given here is for reference purpose only.
  Please confirm your exact requirements with the sales representative while placing your order.
  Refer installation Manual instructions & Waaree warranty statement for terms & conditions.
  Waaree Reserves the right to change the specifications without prior notice.

www.waaree.com

<sup>\*</sup>If you need specific product certificates, and if module installations are to deviate from our guidance specified in our installation manual, please contact your local Waaree sales and technical representatives.