

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

**Solar Panel Guide
Specification Data Sheet**

**Centrosolar America Inc.
C-Series Mono 325-335W
CM72 335SW**

Also available on the web at
EnergyPal.com/centrosolar-america-inc-solar-panels/cm72-335sw



25 YEAR LINEAR PERFORMANCE WARRANTY
AND 10 YEAR PRODUCT WARRANTY



POSITIVE POWER
TOLERANCE 0 TO +5W



TYPE 1 FIRE CLASSIFICATION



WIND/SNOW LOAD
CAPABILITY UP TO 5400PA



AMMONIA & SALT
RESISTANT



ANTI-REFLECTIVE
GLASS COATING



PID FREE



Quality Engineering: Modules are manufactured with the highest quality and tested under our strictest quality standards to ensure a world class product.

Warranty: Centrosolar guarantees a maximum performance digression of 0.7% p.a. in the course of 25 years, a significant added value compared to the two-phase warranties common in the industry, along with our 10 year product warranty.


Independent Testing: Products are tested by third parties.

C-Series Monocrystalline


Technical Data

Module Type	CM72 325SW	CM72 330SW	CM72 335SW
Peak Power (Pmax) * Watts	325	330	335
Module Efficiency	16.7%	17.0%	17.3%
Cell Type	Monocrystalline Silicon		
Number of Cells in Series	72		
Frame/Backsheet Colors	Silver/White		
Power Tolerance	0 / +5 W		
Voltage at Maximum Power (Vmp)	37.22	37.38	37.47
Current at Maximum Power (Imp)	8.74	8.85	8.96
Open Circuit Voltage (Voc)	45.65	45.92	46.04
Short Circuit Current (Isc)	9.24	9.32	9.41
Series Fuse (Amps)	15		
Maximum System Voltage: Vdc	1000		
Temperature Coefficient (Pmax): %/degree C	-0.427		
Temperature Coefficient (Voc): %/degree C	-0.318		
Temperature Coefficient (Isc): %/degree C	0.042		
NOCT: degrees C	44 +/- 2		
Mechanical Load	5400Pa (112 lb/ft ²)		
Weight in lbs (kg)	56.2 lbs/25.5 kg		
Connector Plug Type	MC4 Compatible		

DEPENDENCE ON TEMPERATURE

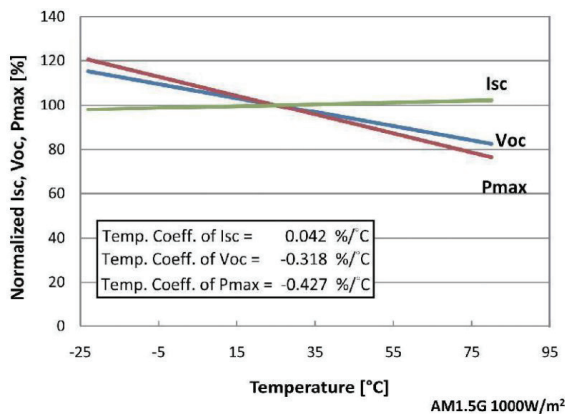

MECHANICAL SPECIFICATIONS

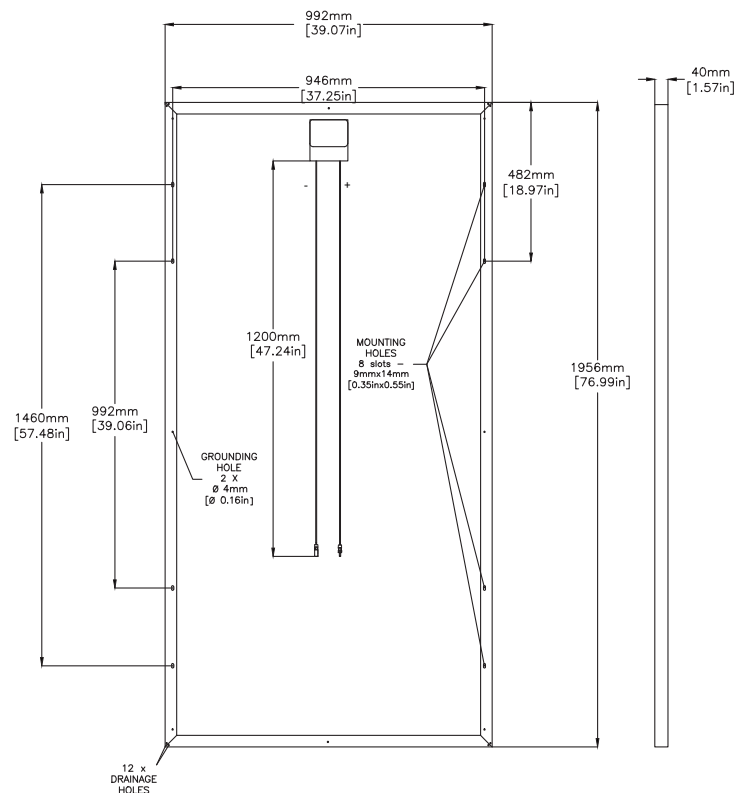

DEPENDENCE ON IRRADIANCE

