

For a Free Quote:

Web: **EnergyPal.com/solar**

Call: **1-800-990-3725**

Email: **contact@energypal.com**

EnergyPal

Solar Panel Guide Specification Data Sheet

CSG PVTech Co., Ltd.
CSGAAAS2-54 (Mono255W-280W)
CSG270S2-54

Also available on the web at
EnergyPal.com/csg-pvtech-co-ltd-solar-panels/csg270s2-54



Over 30 years manufacturing experience, the complete PV chain including silicon materials, wafer, solar glass, solar cell, solar module and solar project, and ISO9001 & ISO14001 certified factory, ensure excellent raw materials and production control.



Solar modules certified by TUV Rheinland (IEC61215& IEC61730) in the extreme conditions (Temperature, load, impact) with good performance.



The good weak light performance (morning, evening and cloudy days) has been tested and approved by professional third-party.



Guarantee from 0 to +6W as power tolerance, customer can obtain 5.8% power more than conventional output.




100% EL test before and after lamination, and finished products EL test, providing higher quality assurance.



High Efficiency PERC

Mono-Crystalline Solar Module

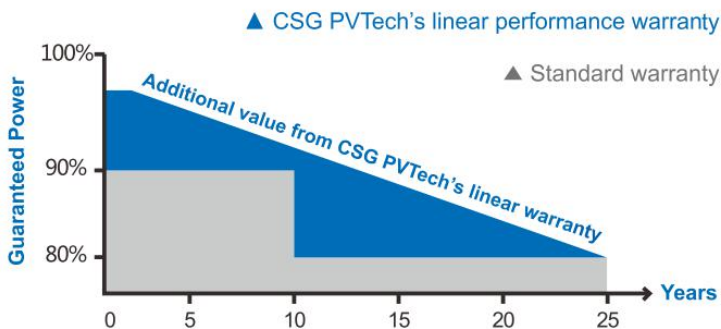

Warranty: For a period of 25 years commencing on the warranty start date, loss of power output of the nominal power output measured at STC for the products shall not exceed:

1. For polycrystalline products: 2.5% in first year, therefore 0.7% per year, ending with 80.7% in the 25th year.
2. For monocrystalline products: 3% in first year, therefore 0.708% per year, ending with 80% in the 25th year.

Typical Electrical Characteristics

Solar Cell:	Mono Crystalline 156.75×156.75mm 54 Cell (6×9) — 5BB Solar Cell					
Max Power	255	260	265	270	275	280
Power Tolerance	0 to +6W					
Voltage at Pmax (Vmp)	29	29.2	29.4	29.6	29.8	30
Current at Pmax (Imp)	8.79	9.56	9.72	9.84	9.97	10.09
Open-circuit Current(Voc)	35.4	35.6	35.8	36	36.2	36.4
Short-circuit Current (Isc)	9.51	8.91	9.02	9.12	9.23	9.33
Max System Voltage(VDC)	1000V(IEC), 600V(UL)					
Module Efficiency (%)	17.3	17.7	18	18.4	18.7	19
No. Of Bypass Diodes (pcs)	3					
Max Series Fuse (A)	15A					
Temperature Coefficient at Pmax	-0.39%/°C					
Temperature Coefficient at Voc	-0.29%/°C					
Temperature Coefficient at Isc	0.04%/°C					
NOCT	45±2 °C					

STC Conditions (1000W/m²; 1.5AM and 25°C Cell Temperature)

Cable Type, diameter, Length	Φ=4mm ² , L=900±5mm
Type of Connector	Compatible type MC4
Dimension A×B×C	1482*992*35mmmm
Weight	16kg
No. Of Draining Holes in Frame	16
Construction	Glass: High Transmission, Low Iron, Tempered Glass 3.2mm Encapsulation: EVA Backsheet: Fluorinated, white
Junction box	IP68 Rated
Frame	Clear anodized aluminum alloy Type 6063T5 frame

Mechanical Characteristics

Dielectric Insulation Voltage	6000VDC max
Operating Temperature	-40°C ~ +85°C
Max Load	5400Pa
Hailstone Impact	25mm (1inch) at 23m/s (52mph)
Fire Rating	Class C

Packing

Packing Configuration	30pcs/ carton, 2pcs/carton
Loading Capacity	896pcs/40HQ 288pcs/20GP