

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet

**Eco Green Energy
EGE-330-350P-72
EGE-345P-72**

Also available on the web at
EnergyPal.com/eco-green-energy-solar-panels/ege-345p-72

SOLAR MODULE EGE-320/350P-72

POLYCRYSTALLINE MODULE

320-350 W / 72 Cells / 5 Bus bars



Eco Green Energy's modules are only made of grade A solar cells with a very high efficiency and ensured more than 25 years lifespan.


KEY FEATURES




5 bus bars cells, with efficiency up to 21 %



IP65 or IP67 junction box for long term weather endurance



High quality aluminum frame, resisting load up to 5400 Pa and wind pressure up to 2400 Pa



High transmissivity, low-iron tempered glass



High performance in low-light environment



Double EL test before and after lamination



OUTPUT POWER WARRANTY





PRODUCT WARRANTY

CERTIFICATES

IEC 61215 / IEC 61730 / CE
ISO 9001:2015

LINEAR PERFORMANCE WARRANTY

10-Year Product Warranty · 25-Year Linear Power Warranty

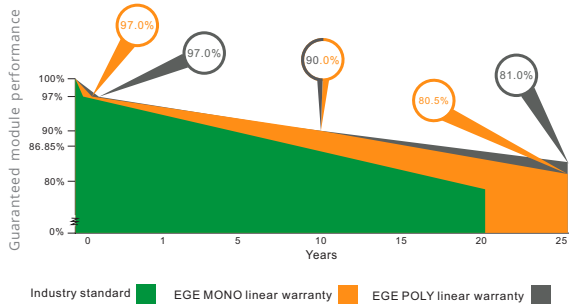

ELECTRICAL DATA AT STC*

Power output (Pmax)	320 W	325 W	330 W	335 W	340 W	345 W	350 W
Power tolerance	0~+5 W	0~+5 W	0~+5 W	0~+5 W	0~+5 W	0~+5 W	0~+5 W
Module efficiency	16.49 %	16.75 %	17.01 %	17.27 %	17.52 %	17.78 %	18.04 %
Maximum power voltage (Vmp)	37.42 V	37.69 V	37.87 V	38.15 V	38.37 V	38.55 V	38.80 V
Maximum power current (Imp)	8.55 A	8.62 A	8.71 A	8.78 A	8.86 A	8.95 A	9.02 A
Open circuit voltage (Voc)	46.35 V	46.64 V	46.79 V	46.32 V	46.55 V	46.7 V	46.92 V
Short circuit current (Isc)	9.07 A	9.12 A	9.18 A	9.16 A	9.24 A	9.31 A	9.40 A

*Standard Test Conditions: Irradiance: 1 000 W / m² • Cell temperature: 25°C • AM: 1.5

ELECTRICAL DATA AT NOCT*

Power output (Pmax)	236.73 W	240.43 W	244.13 W	248.00 W	251.53 W	255.23 W	258.92 W
Maximum power voltage (Vmp)	34.56 V	34.81 V	34.98 V	35.52 V	35.44 V	35.60 V	35.84 V
Maximum power current (Imp)	6.84 A	6.90 A	6.97 A	8.15 A	7.09 A	7.16 A	7.22 A
Open circuit voltage (Voc)	43.03 V	43.29 V	43.43 V	42.78 V	43.21 V	43.35 V	43.55 V
Short circuit current (Isc)	7.36 A	7.40 A	7.45 A	7.44 A	7.50 A	7.56 A	7.63 A

*Nominal Operating Cell Temperature: Irradiance: 800 W / m² • Ambient temperature: 20°C • AM: 1.5 • Wind speed: 1 m/s

TEMPERATURE CHARACTERISTICS

NOCT	45 °C ±2 °C
Temperature coefficient of Pmax	-0.41%/°C
Temperature coefficient of Voc	-0.31%/°C
Temperature coefficient of Isc	+0.06%/°C

MAXIMUM RATINGS

Operating temperature range	-45 °C ~+85 °C
Maximum system voltage	1500 V
Max series fuse rating	15 A
Max front load (e.g.: snow)	5 400 Pa
Max back load (e.g.: wind)	2 400 Pa


MECHANICAL CHARACTERISTICS

Cell type	Polycrystalline (156x156mm)
Number of cells	72
Dimensions	1956x992x40mm
Weight	22.8 kg
Glass	3.2 mm tempered glass
Frame	Anodized aluminium alloy
Junction box	IP65 or IP67
Cable	0.9 m
Connector	MC4 or MC4 compatible

PACKAGING

Type	Pcs/ Type	Weight
Per Pallet	26 pcs	622.8 kg
20ft GP Container	300 pcs	7.2 t
40ft GP Container	624 pcs	14.9 t
40ft HQ Container	696 pcs	16.7 t

I-V CURVES

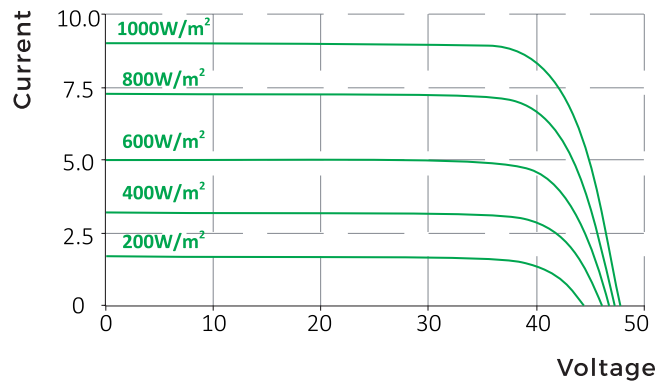

ENGINEERING DRAWINGS (mm)

