

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet

JJ PV Solar Pvt. Ltd.

JP60F220-250

JP60F250

Also available on the web at
EnergyPal.com/jj-pv-solar-pvt-ltd-solar-panels/jp60f250

POLY CRYSTALLINE MODULES

JJ PV Solar introduces all new line of high performance modules in wide applications



KEY FEATURES

- Our solar Modules offers high conversion efficiency
- Our high performing modules have an industry low tolerance of $\pm 3\%$
- Can withstand high wind pressure ,snow load & extreme temperature

QUALITY & SAFETY

- Application Class A, Safety Class II
- ISO 9001:2008(Quality Management system) and ISO 14001 certified company
- Certified for IEC 61215 and IEC 61730 Safety Standard II and 61701 by TUV Intercert

APPLICATIONS

- Off-grid residential roof-tops & other applications
- On-grid commercial/Industrial roof-tops
- Easy Instalation and Handling for Various Applications

CHARACTERISTICS

- Type of Cell : Multi Crystalline Cells
- Front Face : Tempered & Textured Glass (Low iron)
- Frame : Anodized Aluminium, Corner Incert, Screwless
- Junction Box : TUV & UL Approved, IP 65 Protected, With Bypass Diodes
- Warranty : 5 Years Workmanship and 25 Years Linear Power Output



JJ PV Solar Pvt. Ltd.

Nr. Vikas Stove, Bh. Hargange Waybridge,
Vill. Veraval (Shapar), Rajkot - 360 024. Gujarat, India.

Tel : +91 2827 254474 Fax : +91 2827 254476

e-mail : sales@jjpvsolar.com Web : www.jjpvsolar.com



TECHNICAL SPECIFICATIONS


Electrical Parameters

Model	JP60F220	JP60F230	JP60F240	JP60F250
Rated Power(Pmax) watt	220	230	240	250
Volt at Max. power(Vmp in volt)	29	29.3	29.9	30.2
Open circuit voltage(Voc in volt)	36.2	36.8	37	37.1
Current at Max. Power(Imp in Amp)	7.6	7.85	8.03	8.28
Short circuit current(Isc in Amp)	8.25	8.4	8.6	8.7
Fill factor(FF)	>70			
Module efficiency (%)	13~14	>14	>14.5	>15
Standard Test condition	Irradiance:1000W/M2 Temp: 25°C , & AM :1.5G spectrum			
Temp.coeff. Of Pmax(%/K)	-0.44			
Temp.coeff. Of Voltage(mV/K)	-2.13			
Temp.coeff. Of current(mA/K)	4.46			
Max.system voltage (Volt)	1000			
NOCT (Nominal operating Cell temp in °c)	47.0±2			
Tolarence of rated power (%)	± 3			

Mechanical Parameters


Family	No. of Cells	Cells	Glass	Alu. Frame	Junction Box	Cable & Connector	Dimension	Weight
JP60F	10*6	Poly	High transmission, low iron, tempered and textured glass, 3.2mm	Silver Anodized Aluminum Alloy	IP 65, 4 Rail, 3 Diodes	800 to 1000mm, 4 mm2 With MC4/Tyco Connector	1640 X 981 X 40 (mm) or 64.56 X 38.62 X 1.57 (inch)	18.3 K.G

Mounting Dimensions

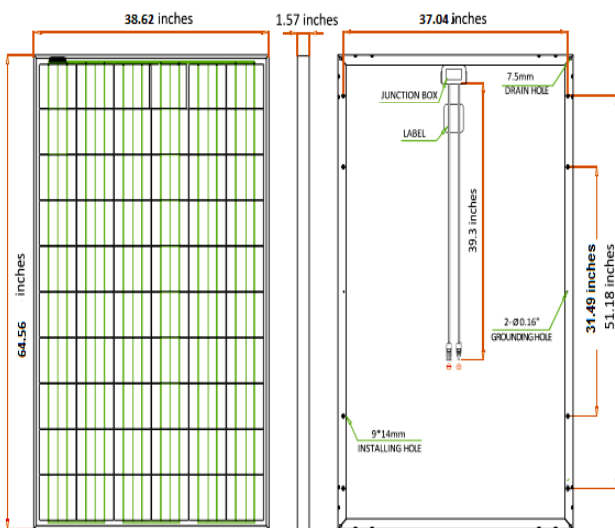

Drawing Only for Reference

I-V Curve with various irradiance level

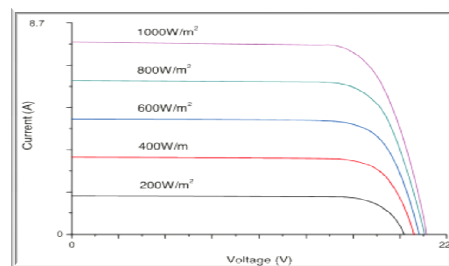

Dependence of Temperature

