

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal


Solar Panel Guide Specification Data Sheet

LONGi Solar Technology Co., Ltd.

LR6-72HBD 370-390M

LR6-72HBD-370M

Also available on the web at
EnergyPal.com/longi-solar-technology-co-ltd-solar-panels/lr6-72hbd-370m

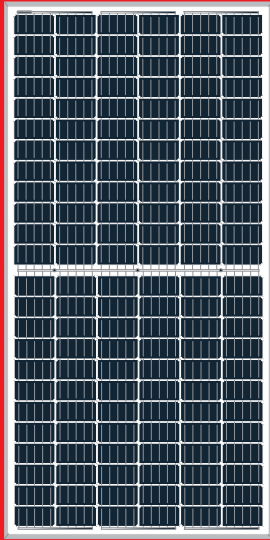


LR6-72HBD 370~390M



**High Efficiency
Low LID Bifacial PERC with
Half-cut Technology**

12-year Warranty for Materials and Processing;
30-year Warranty for Extra Linear Power Output

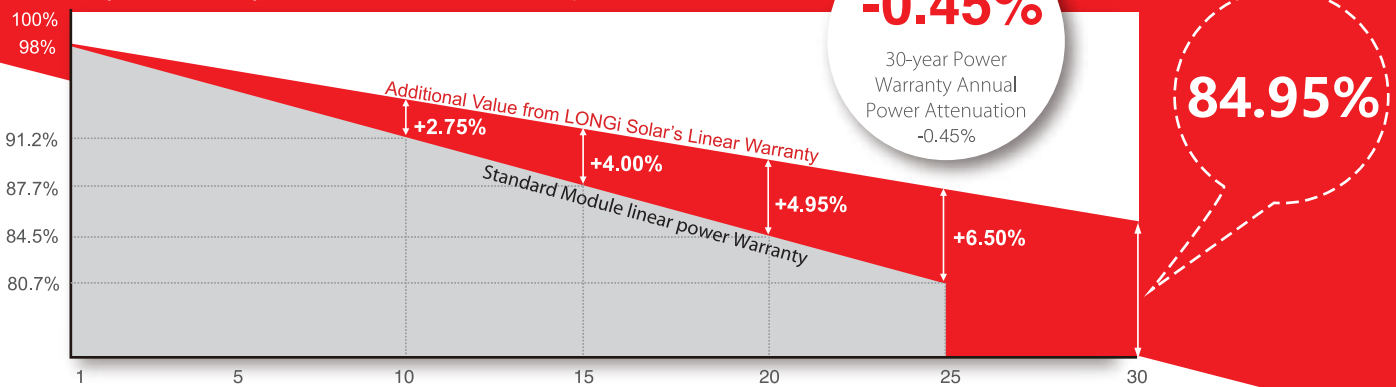

Complete System and Product Certifications

- IEC 61215, IEC 61730, UL 1703
- ISO 9001:2008: ISO Quality Management System
- ISO 14001:2004: ISO Environment Management System
- TS62941: Guideline for module design qualification and type approval
- OHSAS 18001: 2007 Occupational Health and Safety



* Specifications subject to technical changes and tests.
LONGi Solar reserves the right of interpretation.

Front side performance equivalent to conventional low LID mono PERC:

- High module conversion efficiency (up to 19.4%)
- Better energy yield with excellent low irradiance performance and temperature coefficient
- First year power degradation <2%

Bifacial technology enables additional energy harvesting from rear side (up to 25%)

Glass/glass lamination ensures 30 year product lifetime, with annual power degradation < 0.45%, 1500V compatible to reduce BOS cost

Solid PID resistance ensured by solar cell process optimization and careful module BOM selection

Reduced resistive loss with lower operating current

Higher energy yield with lower operating temperature

Reduced hot spot risk with optimized electrical design and lower operating current



Room 801, Tower 3, Lujiazui Financial Plaza, No.826 Century Avenue, Pudong Shanghai, 200120, China
Tel: +86-21-80162606 E-mail: module@longi-silicon.com Facebook: www.facebook.com/LONGi Solar


Note: Due to continuous technical innovation, R&D and improvement, technical data above mentioned may be of modification accordingly. LONGi have the sole right to make such modification at anytime without further notice; Demanding party shall request for the latest datasheet for such as contract need, and make it a consisting and binding part of lawful documentation duly signed by both parties.

LR6-72HBD 370~390M

Design (mm)

Mechanical Parameters

Operating Parameters

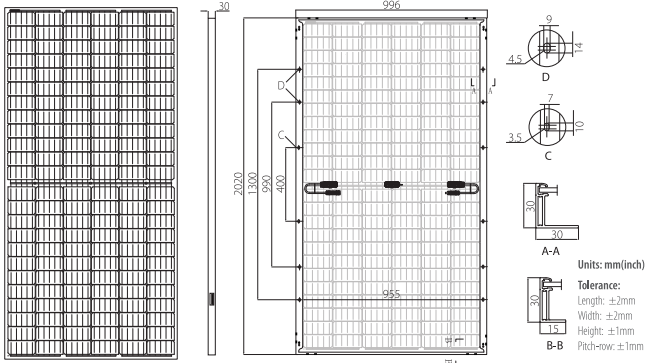

Cell Orientation: 144 (6×24)
 Junction Box: IP67, three diodes
 Output Cable: 4mm², 300mm in length,
 length can be customized
 Glass: Dual glass
 2.0mm coated tempered glass
 Frame: Anodized aluminum alloy frame
 Weight: 26.3kg
 Dimension: 2020×996×30mm
 Packaging: 35pcs per pallet
 175pcs per 20'GP
 770pcs per 40'HC

Operational Temperature: -40 C ~ +85 C
 Power Output Tolerance: 0 ~ +5 W
 Voc and Isc Tolerance: ±3%
 Maximum System Voltage: DC1500V (IEC/UL)
 Maximum Series Fuse Rating: 20A
 Nominal Operating Cell Temperature: 45±2 C
 Safety Class: Class II
 Fire Rating: UL type 3
 Bifaciality: Glazing 70±5%

Electrical Characteristics

Test uncertainty for Pmax: ±3%

Model Number	LR6-72HBD-370M		LR6-72HBD-375M		LR6-72HBD-380M		LR6-72HBD-385M		LR6-72HBD-390M	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax/W)	370	275.1	375	278.8	380	282.6	385	286.3	390	290.0
Open Circuit Voltage (Voc/V)	48.1	44.8	48.3	45.0	48.5	45.2	48.7	45.4	49.1	45.7
Short Circuit Current (Isc/A)	9.80	7.93	9.87	7.99	9.97	8.07	10.03	8.12	10.07	8.15
Voltage at Maximum Power (Vmp/V)	39.8	36.9	40.0	37.1	40.2	37.3	40.4	37.5	40.8	37.9
Current at Maximum Power (Imp/A)	9.30	7.45	9.38	7.51	9.47	7.59	9.53	7.63	9.56	7.66
Module Efficiency(%)	18.4		18.6		18.9		19.1		19.4	

STC (Standard Testing Conditions): Irradiance 1000W/m², Cell Temperature 25 C, Spectra at AM1.5

NOCT (Nominal Operating Cell Temperature): Irradiance 800W/m², Ambient Temperature 20 C, Spectra at AM1.5, Wind at 1m/s

Electrical characteristics with different rear side power gain (reference to 380W front)

Pmax /W	Voc/V	Isc /A	Vmp/V	Imp /A	Pmax gain
399	48.5	10.47	40.2	9.94	5%
418	48.5	10.97	40.2	10.42	10%
437	48.6	11.47	40.3	10.89	15%
456	48.6	11.96	40.3	11.36	20%
475	48.6	12.46	40.3	11.84	25%

Temperature Ratings (STC)


Temperature Coefficient of Isc	+0.060%/ C
Temperature Coefficient of Voc	-0.300%/ C
Temperature Coefficient of Pmax	-0.370%/ C

Mechanical Loading


Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Hailstone Test	25mm Hailstone at the speed of 23m/s

I-V Curve


Current-Voltage Curve (LR6-72HBD-380M)

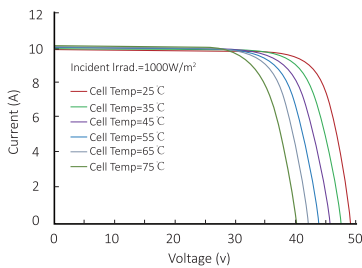

Power-Voltage Curve (LR6-72HBD-380M)

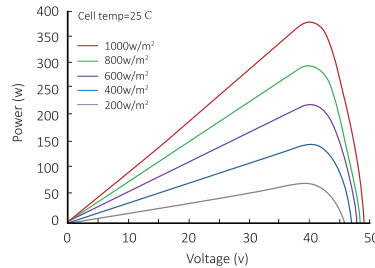

Current-Voltage Curve (LR6-72HBD-380M)

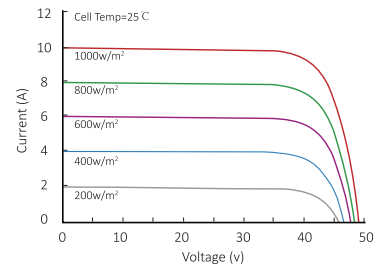

LONGI

Room 801, Tower 3, Lujiazui Financial Plaza, No.826 Century Avenue, Pudong Shanghai, 200120, China
 Tel: +86-21-80162606 E-mail: module@longi-silicon.com Facebook: www.facebook.com/LONGI Solar

Note: Due to continuous technical innovation, R&D and improvement, technical data above mentioned may be of modification accordingly. LONGI have the sole right to make such modification at anytime without further notice; Demanding party shall request for the latest datasheet for such as contract need, and make it a consisting and binding part of lawful documentation duly signed by both parties.