

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal


Solar Panel Guide Specification Data Sheet

**Shenzhen Top Solar Energy Co., Ltd.
PET flexible TS-FS30
TS-FS30**

Also available on the web at
EnergyPal.com/shenzhen-top-solar-energy-co-ltd-solar-panels/ts-fs30

FLEXIBLE SOLAR PANEL

TS-FS30

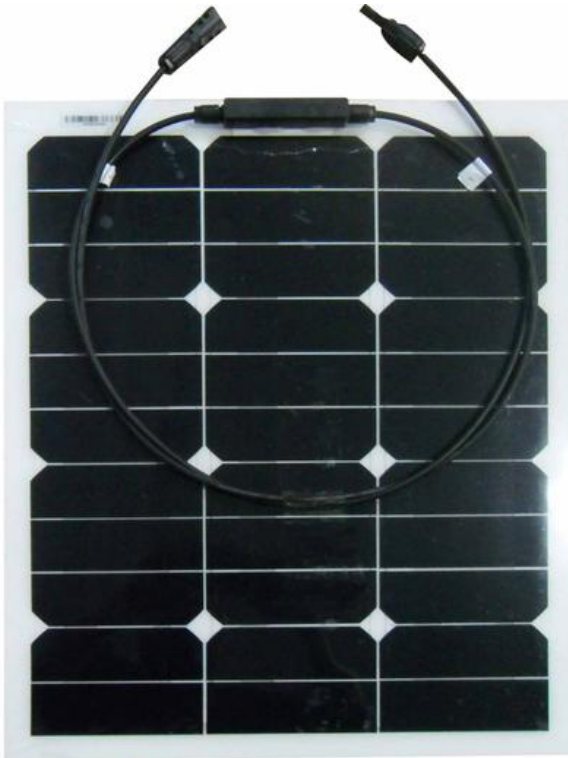

More energy each day



Flexible



High resistance and Walking on panels



Microcracking managing



Light and thin



High resistance to marine environment



Easy to be integrated

GIVING YOU MORE



3% positive tolerance



Series of internal harsh tests



Authorised photovoltaic certificates



Linear performance warranty

FS series is at the top of the range, thanks to the use of selected SunPower monocrystalline silicon cells, reaching a record 23% conversion of sunlight into electricity and with a pleasant appearance, thanks to back-contact technology which hides the electrical contacts. SunPower cells represent the most advanced available technology on the market, and make the Top Solar panels the highest-efficiency flexible panels.


www.topsolar-energy.com

Shenzhen Top Solar Energy Co.,Ltd.

F4,Building C,Zhonghengxinda Industrial Park,

Shajing Town,Baoan District,Shenzhen City,Guangdong Province,China

Tel:86 755 85224431 Fax:86 755 28167996 Email:info@topsolar-energy.com

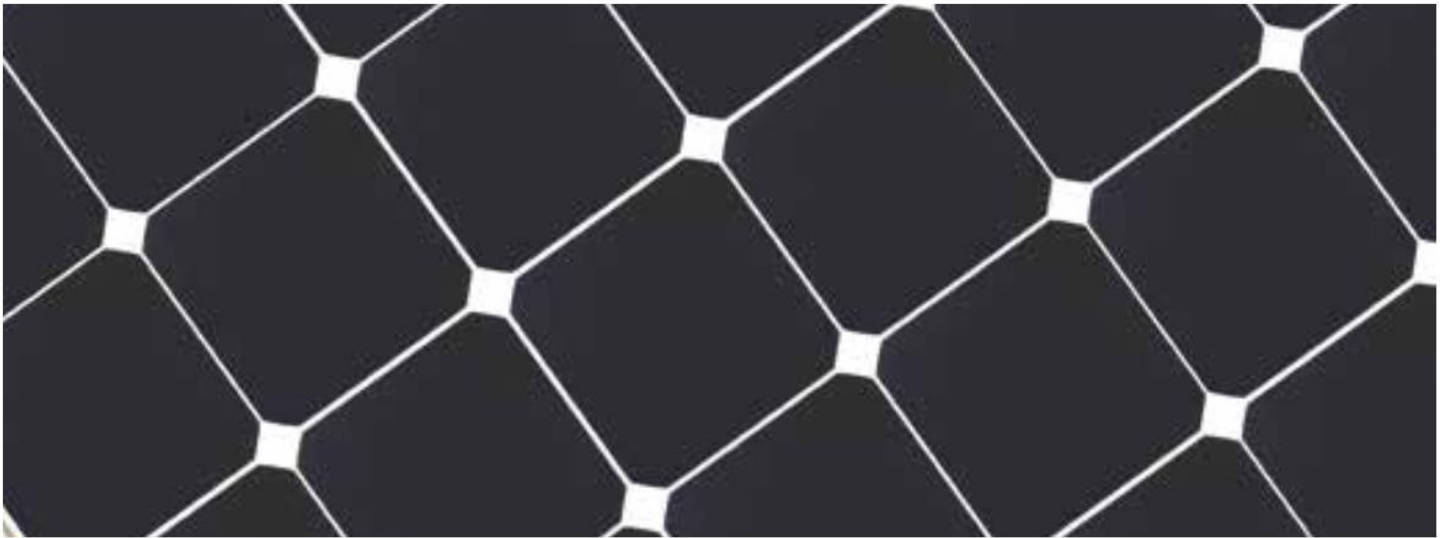

Electrical Characteristics under STC*

Model No.:	TS-FS30
Maximum Power-Pmax(Wp)	30W
Voltage at Maximum Power-Vmp(V)	18.2V
Current at Maximum Power-Imp(A)	1.65A
Open Circuit Voltage-Voc(V)	21.8V
Short Circuit Current-Isc(A)	1.78A
Solar Cell Efficiency(%)	21.6
Power Tolerance(%)	0/+3

Dimensions

Length(mm)	520
Width(mm)	420
Thickness(mm)	1.8
Weight(kg)	0.7

Temperature Characteristics

Temperature Coefficient of Pmax(%)	-0.38%/°C
Temperature Coefficient of Voc(%)	-0.28%/°C
Temperature Coefficient of Isc(%)	0.06%/°C

Maximum System Ratings

Operating Temperature	-40°C to +85°C
Maximum System Voltage	600V DC
Maximum Series Fuse Rating	10A



*STC(Standard Testing Conditions):Irradiance 1000W/m²,cell temperature 25°C,AM=1.5 *NOCT(Nominal Operating Cell Temperature):Irradiance 800W/m², ambient temperature 20°C,wind speed 1m/s

The specifications in this datasheet are subjected to change without prior notice