

**For a Free Quote:**

**Web: [EnergyPal.com/solar](http://EnergyPal.com/solar)**

**Call: 1-800-990-3725**

**Email: [contact@energypal.com](mailto:contact@energypal.com)**

# **EnergyPal**

## **Solar Panel Guide Specification Data Sheet**

**VSUN SOLAR  
VSUN330-60M-BB  
VSUN325-60M-BB**

Also available on the web at  
[EnergyPal.com/vsun-solar-solar-panels/vsun325-60m-bb](http://EnergyPal.com/vsun-solar-solar-panels/vsun325-60m-bb)

# VSUN

Innovative & Smart

## VSUN330-60M-BB

VSUN330-60M-BB VSUN325-60M-BB  
VSUN320-60M-BB VSUN315-60M-BB  
VSUN310-60M-BB

19.82%

Module efficiency

12years

Material & Workmanship warranty

330W

Highest power output

25years

Linear power output warranty



PID-free



World class mono efficiency



Tighter product performance distribution and current sorting reduces the mismatch power loss in system operation



Positive tolerance offer



Good temperature coefficient enables higher output in high temperature regions




Excellent performance under low light conditions




Certified for salt/ammonia corrosion resistance



Load certificates: wind to 2400Pa and snow to 5400Pa

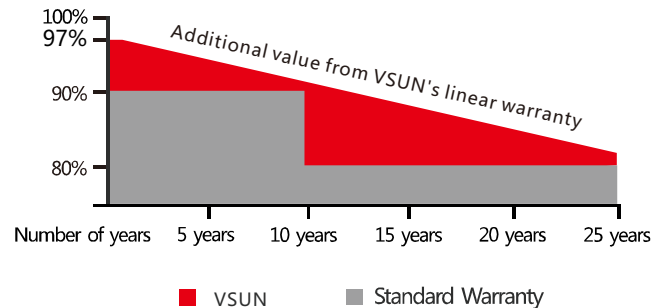

**Munich RE**  **-12-year product warranty**  
**-25-year linear power output warranty**

Invested by Fuji Solar, VSUN is a Japanese solar module solutions provider located in Tokyo that offers Japanese quality solar technologies globally. The group's business started in Japan in 2006, later spreading to North America, Southeast Asia, and EMEA.

Innovative & Smart – VSUN has been committed to providing greener, cleaner, and more intelligent renewable energy solutions. It is focusing on the new energy market and the development of customized and high-efficiency products.

Note:

All information and data are subject to change without notice.  
All rights reserved@VSUN

A Sub-company of **FUJISOLAR**



Engineered in Japan  
vsun@vietnamsunenergy.com  
www.vsun-solar.com

## Electrical Characteristics at Standard Test Conditions(STC)

Module Type	VSUN330-60M-BB	VSUN325-60M-BB	VSUN320-60M-BB	VSUN315-60M-BB	VSUN310-60M-BB
Maximum Power - Pmax (W)	330	325	320	315	310
Open Circuit Voltage - Voc (V)	40.9	40.7	40.4	40.2	40.2
Short Circuit Current - Isc (A)	10.25	10.14	10.03	9.95	9.92
Maximum Power Voltage - Vmpp (V)	33.4	33.2	33	32.8	33
Maximum Power Current - Imp (A)	9.89	9.79	9.7	9.61	9.4
Module Efficiency	19.82%	19.52%	19.22%	18.92%	18.61%

Standard Test Conditions (STC): irradiance 1,000 W/m<sup>2</sup>; AM 1.5; module temperature 25°C. Tolerance of P<sub>mp</sub>: 0~+3%.

Measuring uncertainty of power: ±3%.

## Electrical Characteristics at Normal Operating Cell Temperature(NOCT)

Module Type	VSUN330-60M-BB	VSUN325-60M-BB	VSUN320-60M-BB	VSUN315-60M-BB	VSUN310-60M-BB
Maximum Power - Pmax (W)	244	240.3	236.7	232.9	229.1
Open Circuit Voltage - Voc (V)	37.8	37.6	37.6	37.4	37.2
Short Circuit Current - Isc (A)	8.35	8.27	8.18	8.09	8.02
Maximum Power Voltage - Vmpp (V)	31.1	30.9	30.8	30.7	30.5
Maximum Power Current - Imp (A)	7.85	7.77	7.69	7.59	7.51

Normal Operating Cell Temperature( NOCT) : irradiance 800W/m<sup>2</sup>; wind speed 1 m/s ; cell temperature 45°C; ambient temperature 20°C.

Measuring uncertainty of power: ±3%.

## Temperature Characteristics

NOCT	45°C ( ±2°C )
Voltage Temperature Coefficient	-0.29%/°C
Current Temperature Coefficient	+0.05%/°C
Power Temperature Coefficient	-0.39%/°C

## Maximum Ratings

Maximum System Voltage [V]	1000
Series Fuse Rating [A]	20

## Material Characteristics

Dimensions	1662×1002×35mm (L×W×H)
Weight	18.6kg
Frame	Black anodized aluminum profile
Front Glass	White toughened safety glass, 3.2 mm
Cell Encapsulation	EVA (Ethylene-Vinyl-Acetate)
Back Glass	Composite film
Cells	6×10 pieces monocrystalline solar cells series strings
Junction Box	Rated current≥13A, IP≥67, TUV&UL
Cable&Connector	Length 900 mm, 1×4 mm <sup>2</sup> , compatible with MC4


## Packaging

Dimensions(L×W×H)	1700×1110×1132mm
Container 20'	360
Container 40'	840
Container 40'HC	910


## System Design

Temperature Range	-40 °C to + 85 °C
Withstanding Hail	Maximum diameter of 25 mm with impact speed of 23 m/s
Maximum Surface Load	5,400 Pa
Application class	class A

## Dimensions

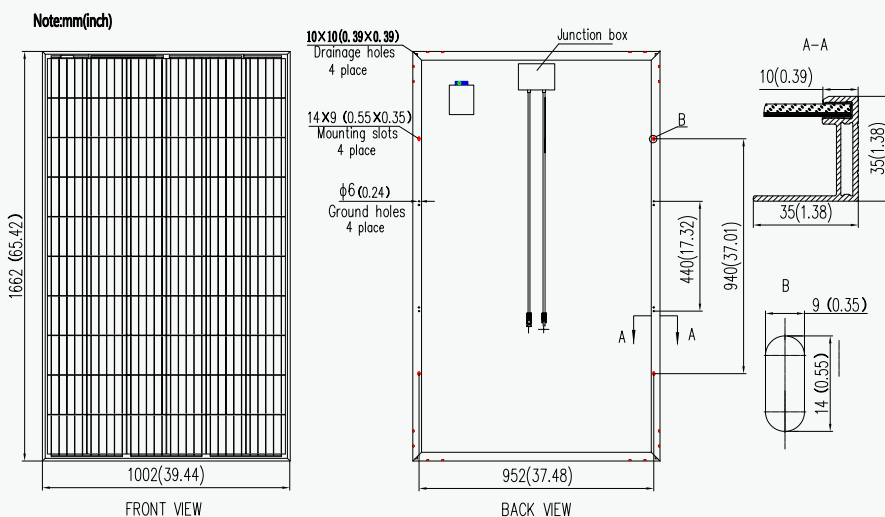

## IV-Curves

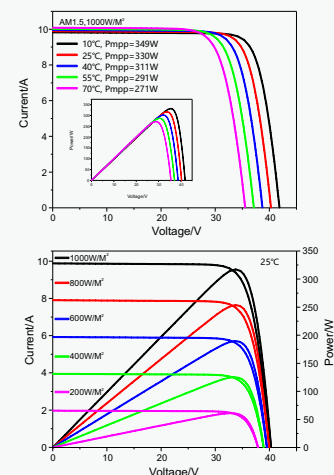

Excellent performance under weak light condition.