

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet

VSUN SOLAR


VSUN335-60M

VSUN325-60M

Also available on the web at
EnergyPal.com/vsun-solar-solar-panels/vsun325-60m

VSUN

Innovative & Smart

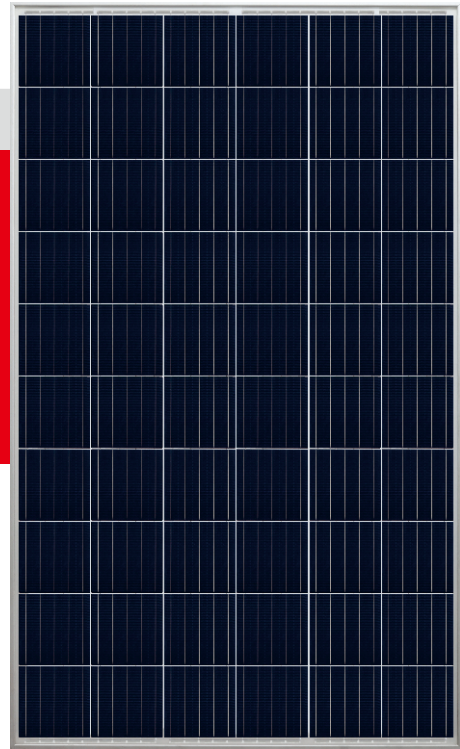

VSUN335-60M

VSUN335-60M

VSUN330-60M

VSUN325-60M

VSUN320-60M

VSUN315-60M

20.12%

Module efficiency

12years

Material & Workmanship warranty

335W

Highest power output

25years

Linear power output warranty



PID-free



World class mono efficiency



Tighter product performance distribution and current sorting reduces the mismatch power loss in system operation



Positive tolerance offer



Good temperature coefficient enables higher output in high temperature regions




Excellent performance under low light conditions




Certified for salt/ammonia corrosion resistance



Load certificates: wind to 2400Pa and snow to 5400Pa

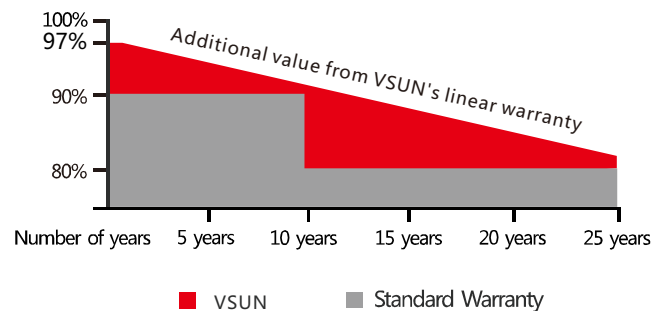

Munich RE  **-12-year product warranty**
-25-year linear power output warranty

Invested by Fuji Solar, VSUN is a Japanese solar module solutions provider located in Tokyo that offers Japanese quality solar technologies globally. The group's business started in Japan in 2006, later spreading to North America, Southeast Asia, and EMEA.

Innovative & Smart – VSUN has been committed to providing greener, cleaner, and more intelligent renewable energy solutions. It is focusing on the new energy market and the development of customized and high-efficiency products.

Note:

All information and data are subject to change without notice.
All rights reserved@VSUN

A Sub-company of **FUJISOLAR**



Engineered in Japan
vsun@vietnamsunenergy.com
www.vsun-solar.com

Electrical Characteristics at Standard Test Conditions(STC)

Module Type	VSUN335-60M	VSUN330-60M	VSUN325-60M	VSUN320-60M	VSUN315-60M
Maximum Power - Pmax (W)	335	330	325	320	315
Open Circuit Voltage - Voc (V)	41.2	40.9	40.7	40.4	40.2
Short Circuit Current - Isc (A)	10.41	10.25	10.14	10.03	9.95
Maximum Power Voltage - Vmpp (V)	34	33.4	33.2	33	32.8
Maximum Power Current - Imp (A)	9.86	9.89	9.79	9.7	9.61
Module Efficiency	20.12%	19.82%	19.52%	19.22%	18.92%

Standard Test Conditions (STC): irradiance 1,000 W/m²; AM 1.5; module temperature 25°C. Tolerance of Pmp: 0~+3%.

Measuring uncertainty of power: ±3%.

Electrical Characteristics at Normal Operating Cell Temperature(NOCT)

Module Type	VSUN335-60M	VSUN330-60M	VSUN325-60M	VSUN320-60M	VSUN315-60M
Maximum Power - Pmax (W)	247.7	244	240.3	236.7	232.9
Open Circuit Voltage - Voc (V)	38.1	37.8	37.6	37.6	37.4
Short Circuit Current - Isc (A)	8.41	8.35	8.27	8.18	8.09
Maximum Power Voltage - Vmpp (V)	31.3	31.1	30.9	30.8	30.7
Maximum Power Current - Imp (A)	7.9	7.85	7.77	7.69	7.59

Normal Operating Cell Temperature(NOCT) : irradiance 800W/m²; wind speed 1 m/s ; cell temperature 45°C; ambient temperature 20°C.

Measuring uncertainty of power: ±3%.

Temperature Characteristics

NOCT	45°C (±2°C)
Voltage Temperature Coefficient	-0.29%/°C
Current Temperature Coefficient	+0.05%/°C
Power Temperature Coefficient	-0.39%/°C

Maximum Ratings

Maximum System Voltage [V]	1000
Series Fuse Rating [A]	20

Material Characteristics

Dimensions	1662×1002×35mm (L×W×H)
Weight	18.6kg
Frame	Anodized aluminum profile
Front Glass	White toughened safety glass, 3.2 mm
Cell Encapsulation	EVA (Ethylene-Vinyl-Acetate)
Back Glass	Composite film
Cells	6×10 pieces monocrystalline solar cells series strings
Junction Box	Rated current ≥13A, IP≥67, TUV&UL
Cable&Connector	Length 900 mm, 1×4 mm ² , compatible with MC4


Packaging

Dimensions(L×W×H)	1700×1110×1132mm
Container 20'	360
Container 40'	840
Container 40'HC	910


System Design

Temperature Range	-40 °C to + 85 °C
Withstanding Hail	Maximum diameter of 25 mm with impact speed of 23 m/s
Maximum Surface Load	5,400 Pa
Application class	class A

Dimensions

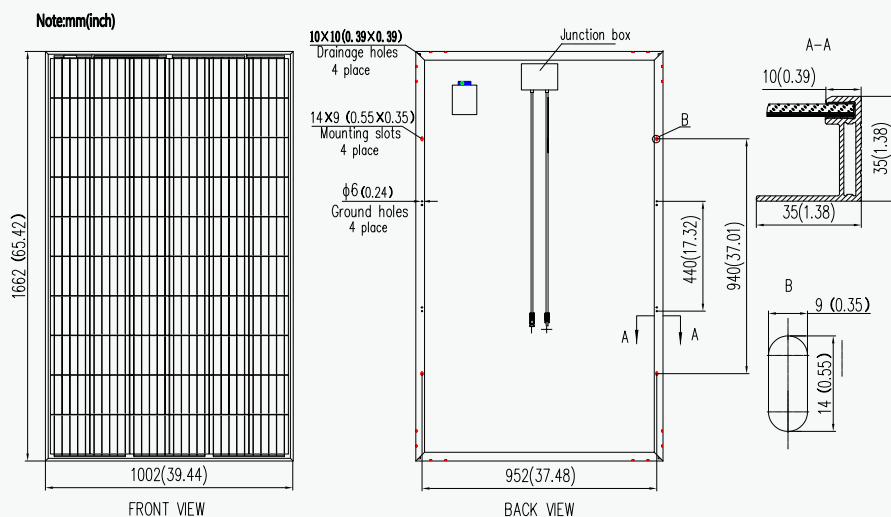

IV-Curves

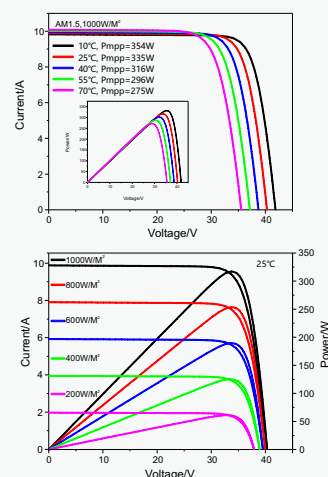

Excellent performance under weak light condition.