

For a Free Quote:

Web: EnergyPal.com/solar

Call: 1-800-990-3725

Email: contact@energypal.com

EnergyPal

Solar Panel Guide Specification Data Sheet

**Motech Industries Inc.
XS60CB PERC 300-310
XS60CB-300**

Also available on the web at
EnergyPal.com/motech-industries-inc-solar-panels/xs60cb-300



XS60CB PHOTOVOLTAIC MODULES

XS60+SERIES PHOTOVOLTAIC MODULES

PEAK POWER: 300-310 Wp

FEATURES INCLUDE:

- 60 MOTTECH monocrystalline solar cells connected in series
- Positive power tolerance of 0~3% improves system performance
- Industry-leading module efficiency: maximum efficiency of 18.9%
- Tested up to 5400Pa for maximum load resistance
- Verified resistance against PID effects
- Progressive Power Warranty guarantees 80.2% of rated power at 25 years
- Manufactured globally with world-class quality standards




QUALITY, RELIABILITY, AND KWH YIELD

MOTTECH modules are powered by industry acknowledged high performance, reliable MOTTECH silicon cells. 20 years of experience in solar module engineering and design, along with rigorous durability and performance tests, ensure reliable lifetime performance and maximum kWh yield.

25-YEAR PROGRESSIVE WARRANTY*

- 25-year progressive power warranty
- 10-year warranty on materials and workmanship

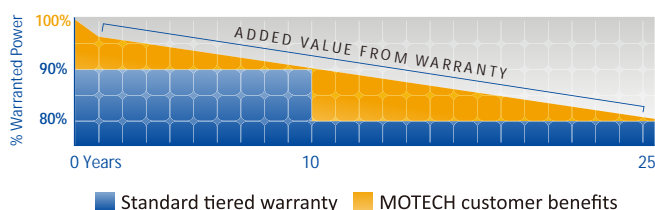


CERTIFICATIONS & STANDARDS*



Application Class A
Safety Class II


PHYSICAL CHARACTERISTICS

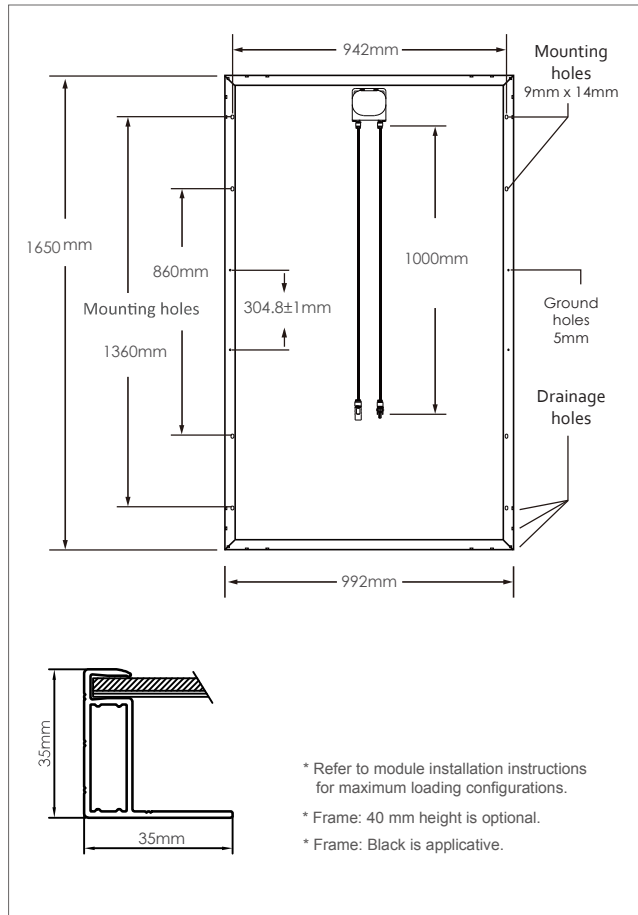

PHYSICAL DESIGN PROPERTIES

Dimension	1650×992×35mm
Weight	18.5 kg±5%
Glass	3.2mm low iron tempered glass with anti-reflective coating
Junction Box	IP67 or above with 3 bypass diodes
Output Cables	Φ4.0mm ² , 1000mm
Connectors	MC4 Compatible
Packing	31 pcs/ pallet, 868 pcs/ container (40ft HQ)

IV CURVE

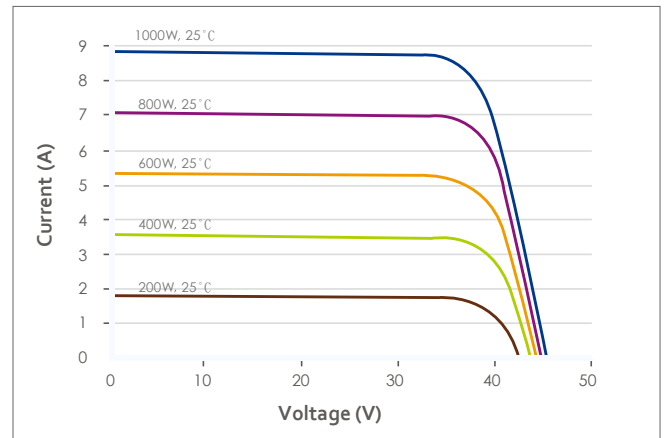

ELECTRICAL PERFORMANCE

XS60CB-300
XS60CB-305
XS60CB-310

Electrical Performance @ STC				
Maximum Power Pmax[Wp]		300	305	310
Max. Power Voltage Vmpp(V)		32.68	32.97	33.26
Max. Power Current Imp(A)		9.18	9.25	9.32
Open Circuit Voltage Voc(V)		38.91	39.05	39.19
Short Circuit Current Isc(A)		9.47	9.50	9.53
Module Efficiency (%)		18.3%	18.6%	18.9%

ELECTRICAL PERFORMANCE PARAMETERS

Isc Temperature Coefficient	α (%/°C)	+0.06	Max. Series Fuse	15A
Voc Temperature Coefficient	β (%/°C)	-0.33	Max. System Voltage	IEC 1000V
Pmax Temperature Coefficient	γ (%/°C)	-0.41	Nominal Operating Cell Temp. (NOCT)	45°C ± 2°C
Efficiency Reduction at 200W/m ² , 25°C		<5%		

IV parameters are rated at Standard Test Conditions (Irradiance of 1000 W/m², AM 1.5, cell temperature 25°C). All measurements are guaranteed at the laminate leads. NOCT is measured at 800 W/m², 20°C ambient, and 1 m/s windspeed. Specifications are subject to change without notice. Motech reserves the rights of final interpretation and revision on this datasheet.

DOC18TW053 Rev A Oct 2018